




LOSI TLR TUNED LMT 1/10 KIT



KIT

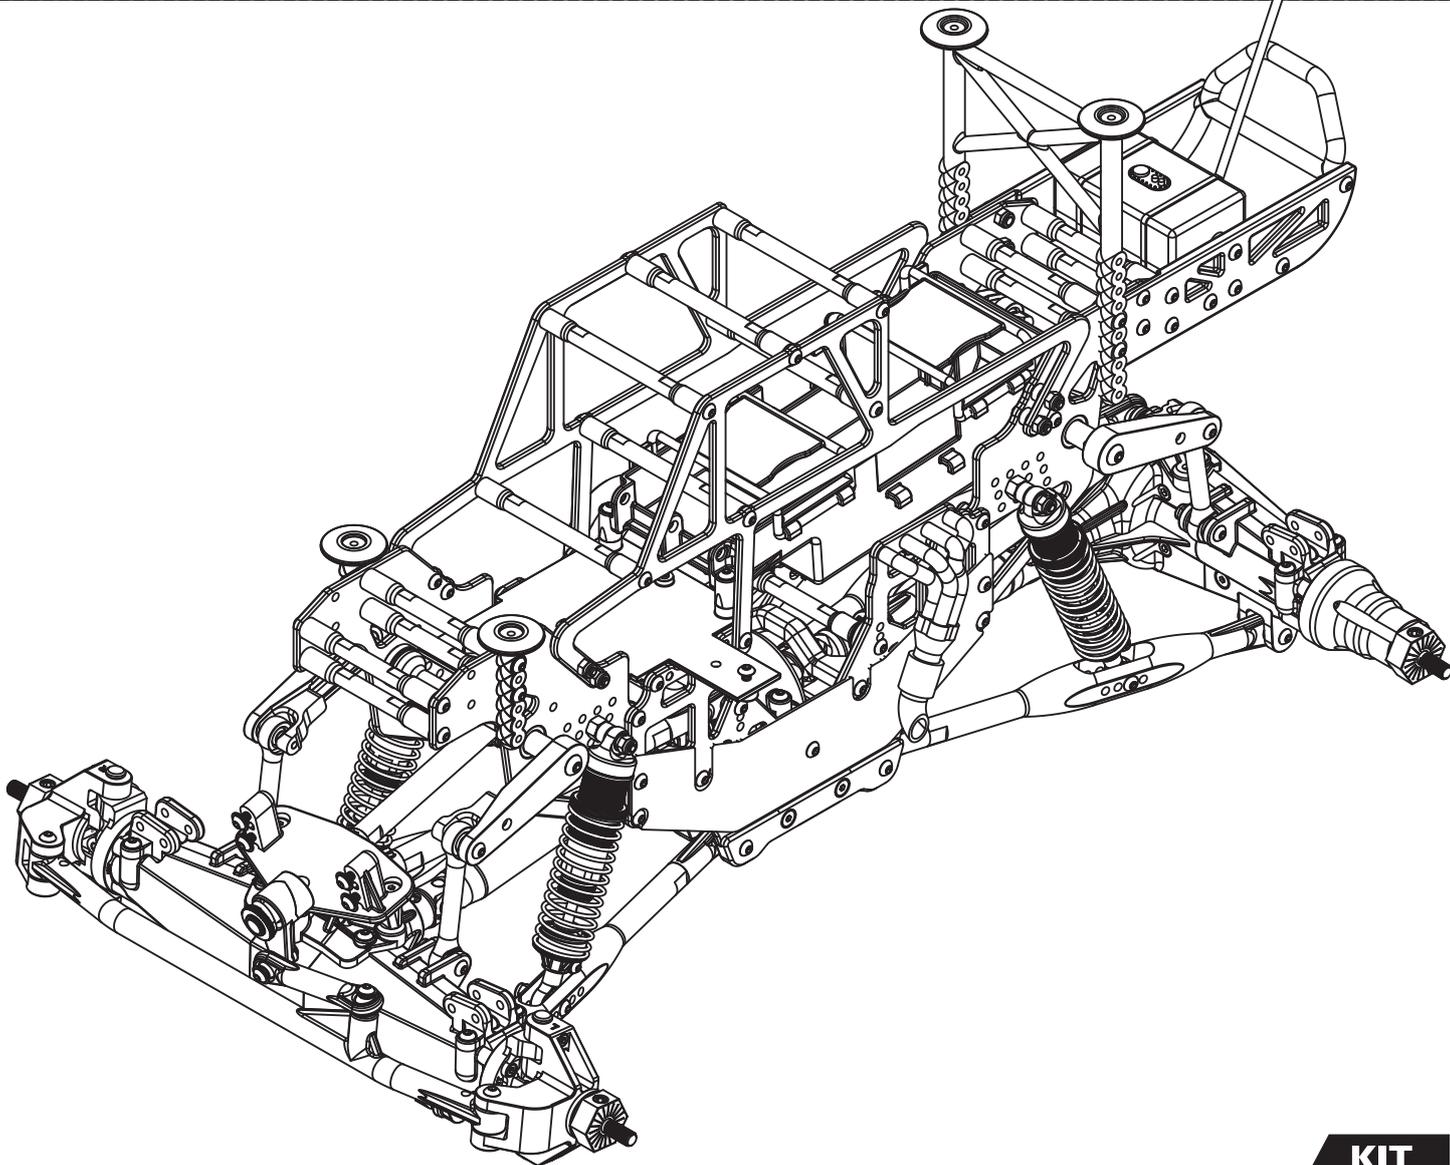

Scan the QR code and select the Manuals and Support quick links from the product page for the most up-to-date manual information.

LOS04027

INSTRUCTION MANUAL

Before operating this vehicle, please read all printed materials thoroughly. Horizon Hobby is not responsible for inadvertent errors in this manual.

NOTICE

All instructions, warranties and other collateral documents are subject to change at the sole discretion of Horizon Hobby, LLC. For up-to-date product literature, visit horizonhobby.com or towerhobbies.com and click on the support or resources tab for this product.

MEANING OF SPECIAL LANGUAGE

The following terms are used throughout the product literature to indicate various levels of potential harm when operating this product:

WARNING: Procedures, which if not properly followed, create the probability of property damage, collateral damage, and serious injury OR create a high probability of superficial injury.

CAUTION: Procedures, which if not properly followed, create the probability of physical property damage AND a possibility of serious injury.

NOTICE: Procedures, which if not properly followed, create a possibility of physical property damage AND a little or no possibility of injury.



WARNING: Read the ENTIRE instruction manual to become familiar with the features of the product before operating. Failure to operate the product correctly can result in damage to the product, personal property and cause serious injury.

This is a sophisticated hobby product. It must be operated with caution and common sense and requires some basic mechanical ability. Failure to operate this Product in a safe and responsible manner could result in injury or damage to the product or other property. This product is not intended for use by children without direct adult supervision. Do not use with incompatible components or alter this product in any way outside of the instructions provided by Horizon Hobby, LLC. This manual contains instructions for safety, operation and maintenance. It is essential to read and follow all the instructions and warnings in the manual, prior to assembly, setup or use, in order to operate correctly and avoid damage or serious injury.

WARNING AGAINST COUNTERFEIT PRODUCTS Always purchase from a Horizon Hobby, LLC authorized dealer to ensure authentic high-quality Spektrum product. Horizon Hobby, LLC disclaims all support and warranty with regards, but not limited to, compatibility and performance of counterfeit products or products claiming compatibility with DSM or Spektrum.

Age Recommendation: Not for children under 14 years. This is not a toy.

SAFETY PRECAUTIONS AND WARNINGS

- Always keep a safe distance in all directions around your model to avoid collisions or injury. This model is controlled by a radio signal subject to interference from many sources outside your control. Interference can cause momentary loss of control.
- Always operate your model in open spaces away from full-size vehicles, traffic and people.
- Always carefully follow the directions and warnings for this and any optional support equipment (chargers, rechargeable battery packs, etc.).
- Always keep all chemicals, small parts and anything electrical out of the reach of children.
- Always avoid water exposure to all equipment not specifically designed and protected for this purpose. Moisture causes damage to electronics.
- Never place any portion of the model in your mouth as it could cause serious injury or even death.
- Never operate your model with low transmitter batteries.

WELCOME TO LOSI TLR TUNED

With its strong racing heritage and dedication to winning, the TLR (Team Losi Racing) brand represents the peak of RC vehicle design. Now the Losi TLR Tuned LMT shares that expertise with you. Loaded with TLR option parts, it's the solid axle monster truck that comes prepared for every step of your climb to become the champion.

You feel a sudden rush in those final seconds before the light turns green. It's the moment of the race when your preparation and the potential of your TLR Tuned LMT come together in a surge of confidence, ready to be released with a squeeze of the throttle trigger. As you put the power to the ground, corner flat, launch jumps, and soak in the landings, you move closer and closer to the pinnacle of RC monster truck performance.

Freestyle is next. Becoming the freestyle champion means jumping, flipping, and sliding at the edge of any truck's limits. But it's no problem for the TLR Tuned LMT. Durable aluminum parts give you the grit to power out harsh landings, while carbon fiber upgrades offset their weight and improve support.

For these reasons and more, with the TLR Tuned LMT as your partner, there's no place to go but up. The TLR passion for racing shines through with increased acceleration, improved cornering, and many more high-performance capabilities. Experience the difference it makes — in your truck and in you.

KIT/MANUAL ORGANIZATION

The kit is composed of different bags marked A through I, and Spare Hardware. If assembling to the recommended kit setup, the Spare Parts bag will not be needed. It is highly recommended to only open one Sub Bag (for example, A1) at a time. Once complete with the manual steps to complete this bag, you should have no parts remaining and be ready for the next Sub Bag (for example, A2).

REQUIRED COMPONENTS	RECOMMENDED COMPONENTS	PART NUMBER
Transmitter	DX5 Pro DSMR Tx Only	SPMR5010
Receiver	SR315 DSMR 3 CH Receiver	SPMSR315
Steering Servo	S6280 U-T / H-S Digital HV WP Servo	SPMSS6280
Motor	Firma Brushless Motor, 3150Kv, 4mm Bullet	SPMXSM1000
ESC	Firma 130A Brushless Smart ESC, 2S-4S	SPMXSE1130
Battery	5000mAh 2S 7.4V SmartG2100C IC5	SPMX52S100H5
Charger	Smart S1200 G2 AC Charger; 1x200	SPMXC2020

TOOLS REQUIRED

1.5mm Hex Wrench
 2mm Hex Wrench
 2.5mm Hex Wrench
 5.0mm Nut Driver
 5.5mm Nut Driver
 8.0mm Nut Driver
 Body Scissors
 Needle-Nose Pliers
 Regular Pliers
 Hobby Knife

SPECIFICATIONS

Wheelbase 15.0 in (381mm)
 Front Track Width 15.25 in (388mm)
 Rear Track Width 15.25 in (388mm)
 Overall Height 10.5in (267mm)
 Overall Length with Tires 20.75 in (526mm)






ICON KEY

	Apply TLR-Lok™ Threadlock - TLR76009
	Apply High Pressure Black Grease - TLR77000
	Apply CA Glue - TLR76007
	Degrease with Motor Spray -DYN5500
	Fill With Silicone Oil
	Pay Special Attention
	Cut/Trim
	Ensure Free Movement
	Ensure Free Rotation

	Ensure Proper Orientation
	Push Firm
	Side Shown
	Assemble Other Side the Same
	Repeat/Build Multiple
	Screw Partially
	DO NOT Over-Tighten/Snug Tight
	Tighten





A1

x2 Front and Rear Differential Assemblies

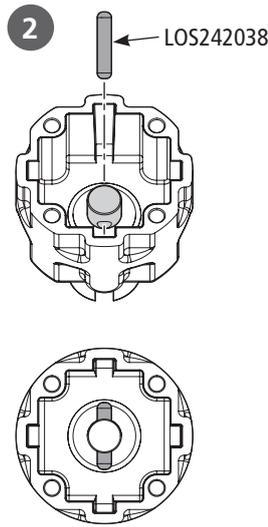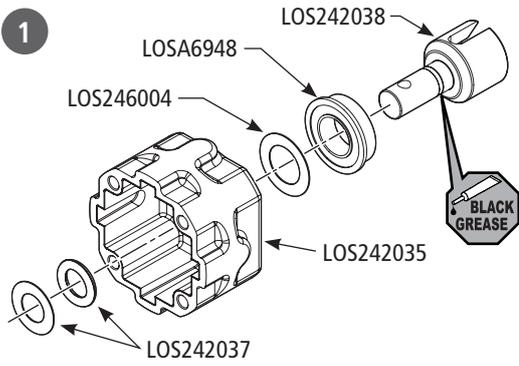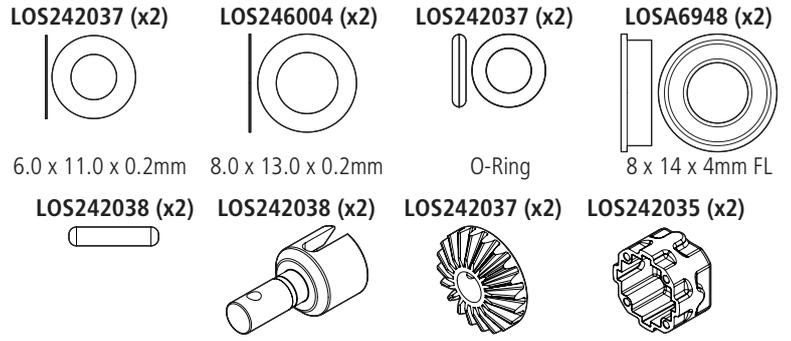

A2

x2

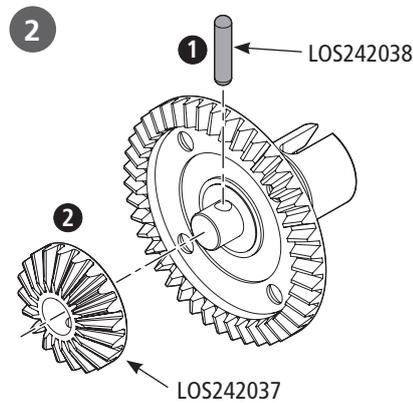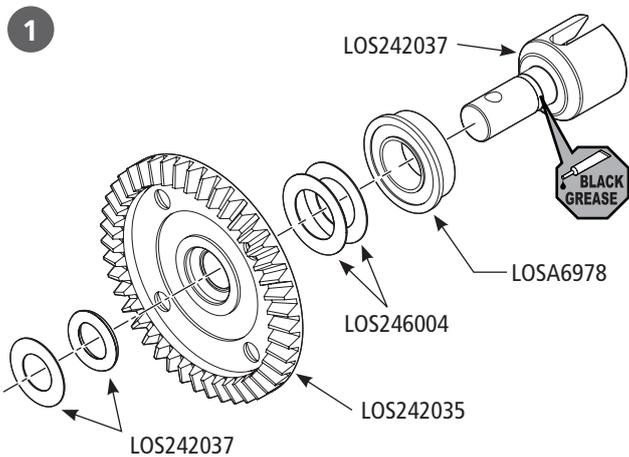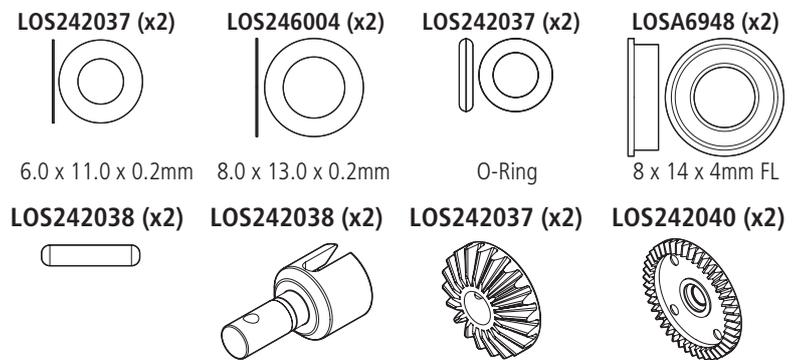




TLR5963 (x8)






LOS242037 (x8)

LOS242037 (x4)

LOS242036 (x2)



M3 x 12mm FH

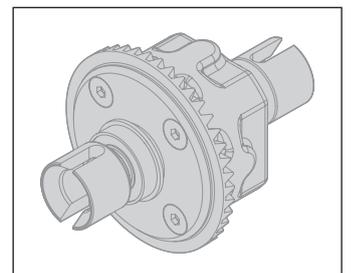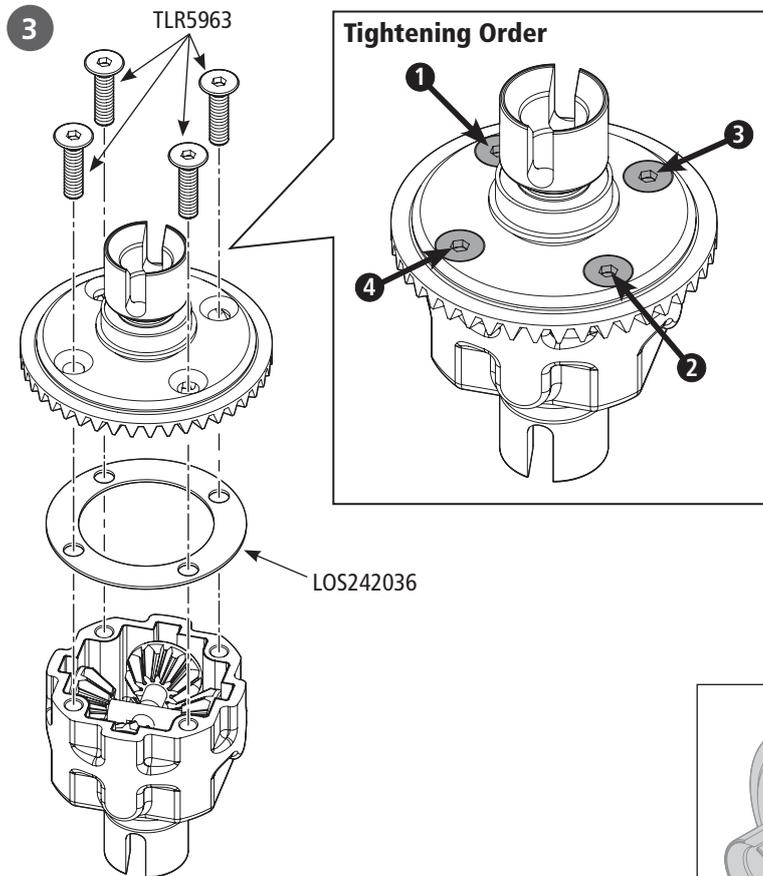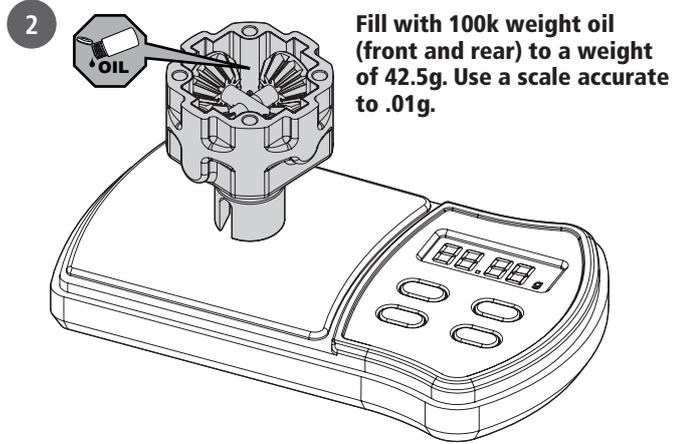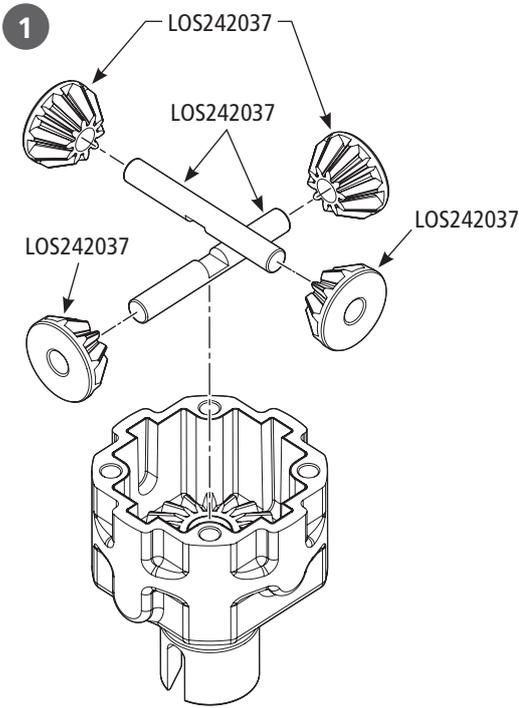

Set the diff assembly aside

A4

Center Differential Assembly

LOS242037 x1




6.0 x 11.0 x 0.2mm

LOS242037 x1



O-Ring

LOSA6948 x1




8 x 14 x 4mm FL

LOS242039 (x1)








LOS242039 (x1)



LOS242037 (x1)



LOS242035 (x1)

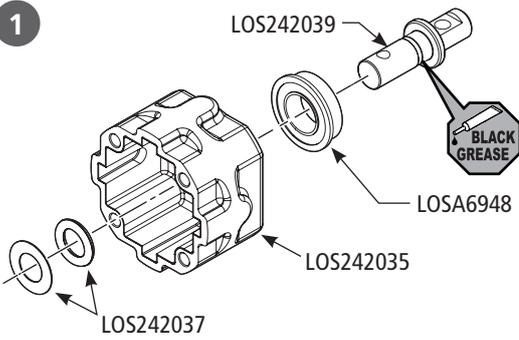

A5

LOS242037 x1




6.0 x 11.0 x 0.2mm

LOS242037 x1




O-Ring

LOSA6948 x1



8 x 14 x 4mm FL




LOS242039 x1



LOS242037 x1



LOS242040 x1





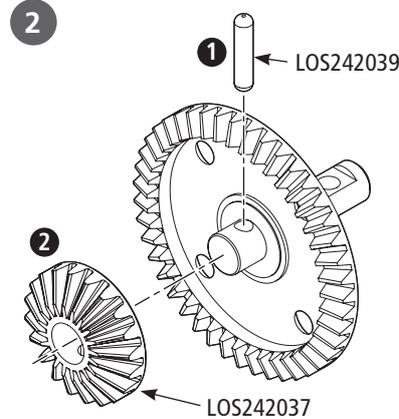
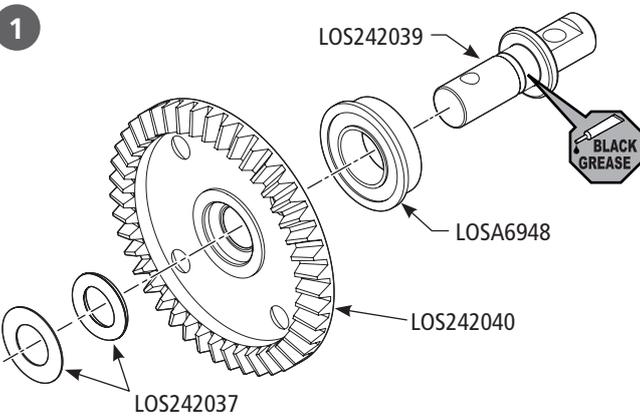


TLR5963 (x8)

LOS242037 (x8)

LOS242037 (x4)

LOS242036 (x2)

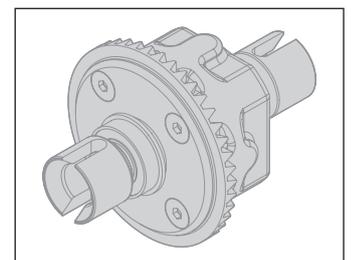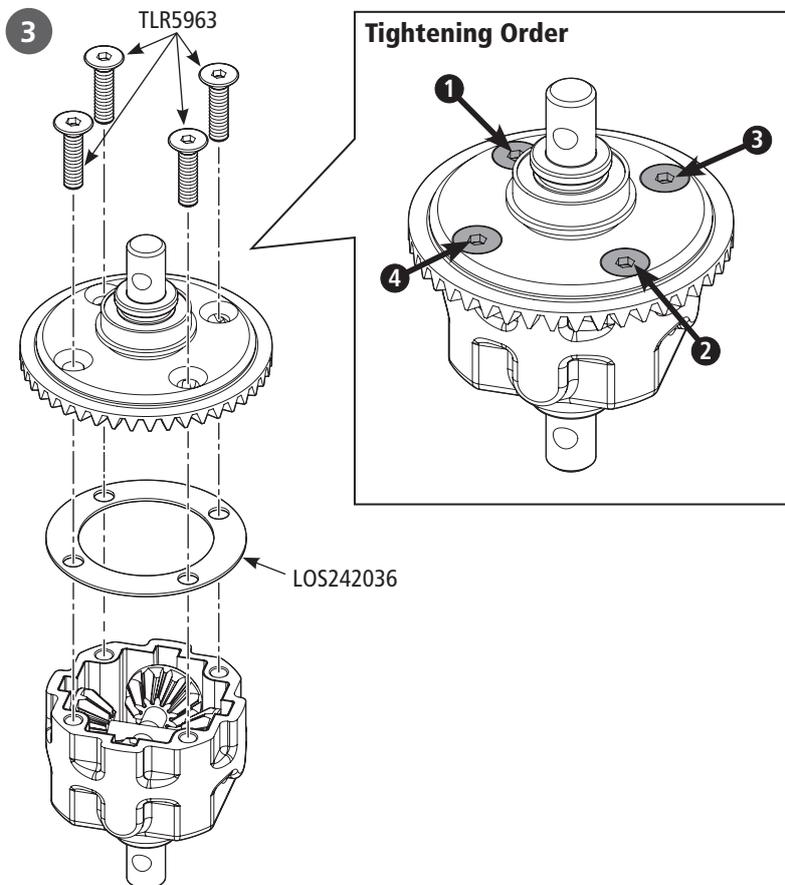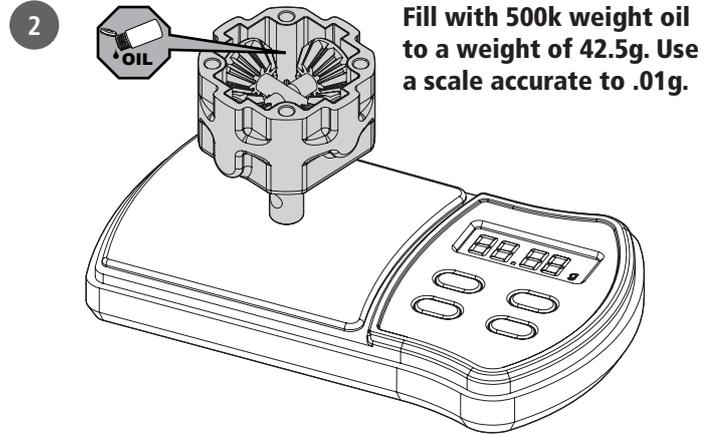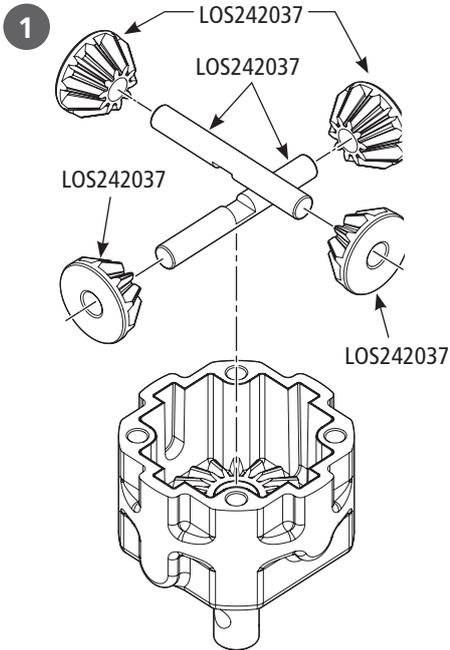

Set the diff assembly aside


B1

TLR144000 (x8)
M4 x 25 Setscrew

LOS244010 (x8)
7mm

LOS244011 (x8)

TLR144000 (x4)

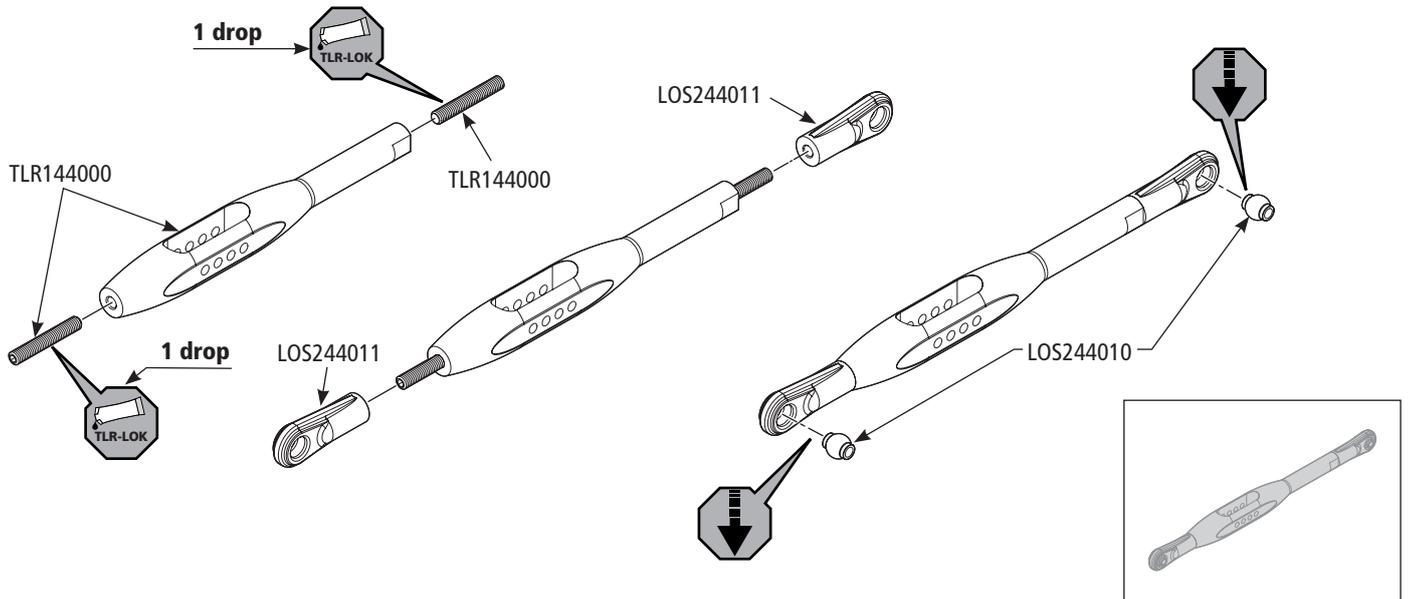


B2

LOS244013 (x8)
M4 x 25 Setscrew

LOS244010 (x8)
7mm

LOS244011 (x8)

LOS244013 (x4)

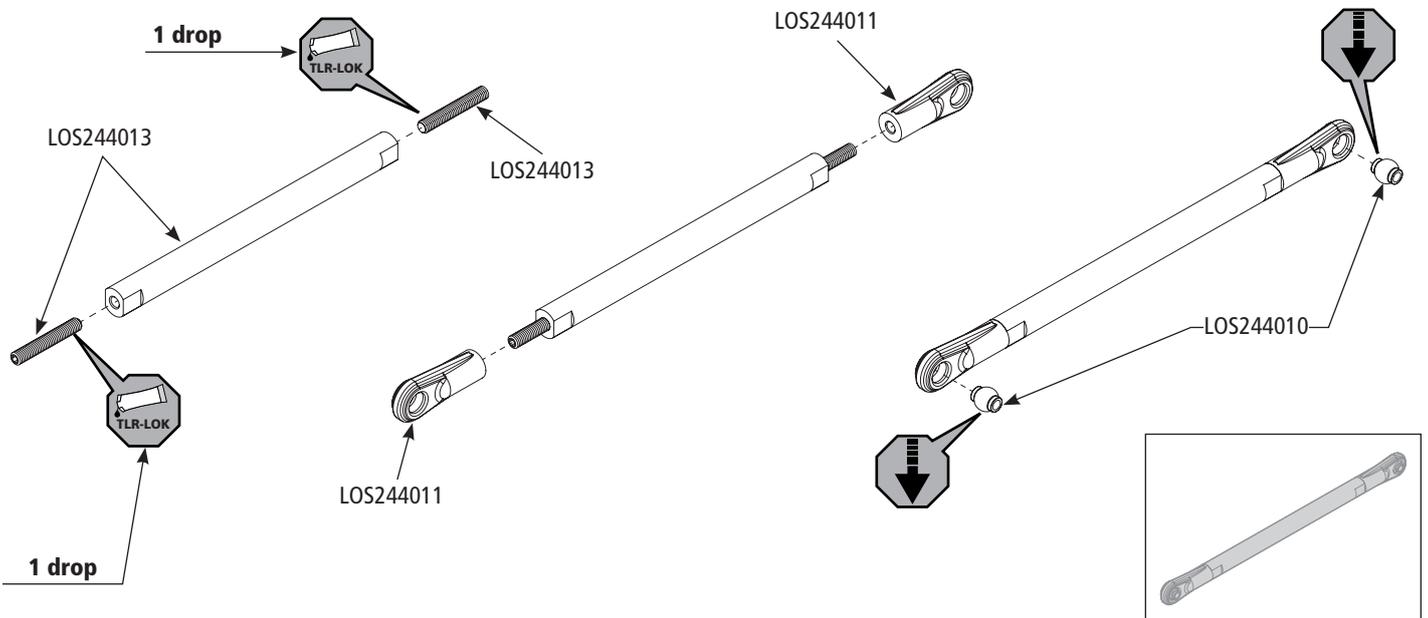

C3

x4


LOS244010 (x4)

TLR143004 (x4)

TLR143003 (x4)




7mm

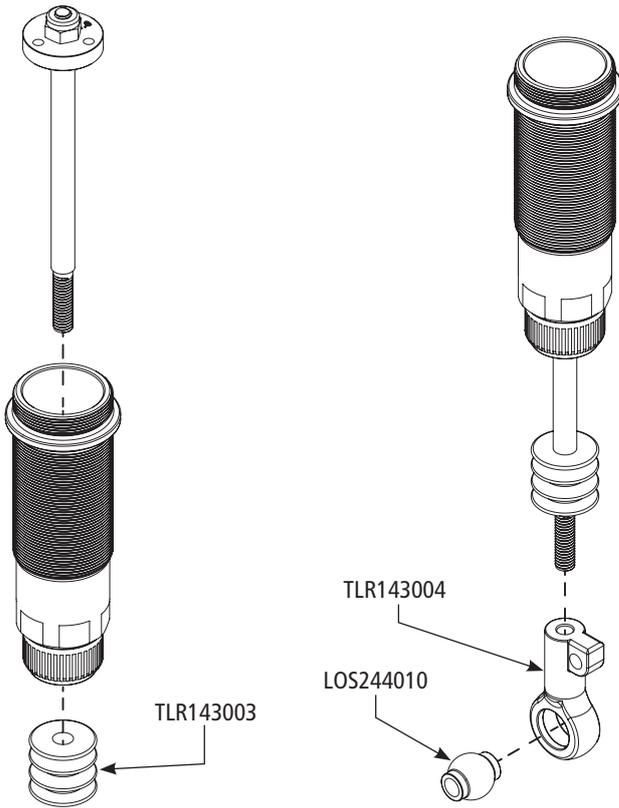

TLR143004

LOS244010

TLR143003



C4

x4


TLR233043 (x4)

TLR233043 (x4)


TLR143000 (x4)



M2.5 x 4mm BH




1

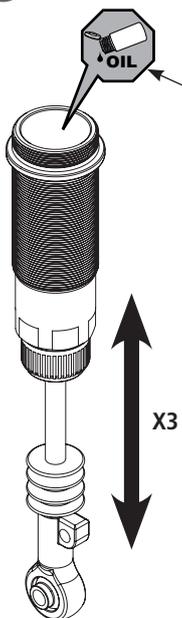

FR - 40WT
TLR74010
RR - 40WT
TLR74010


x3

2

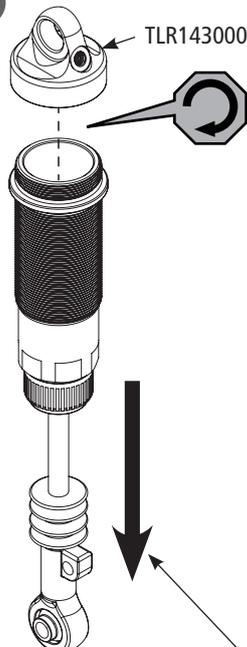


TLR143000

3

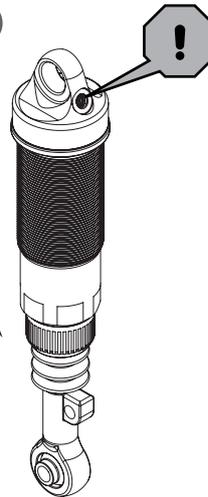


Slow

4

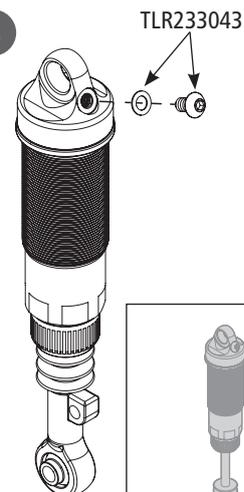


TLR233043



C5

x4

TLR255002 (x4) TLR143003 (x4) TLR143000 (x4) TLR143004 (x4)





M2.5 x 10mm BH

O-Ring




TLR143006 (x2)

TLR143007 (x2)




Green, 3.0 lbs, Front


Orange, 3.6 lbs, Rear

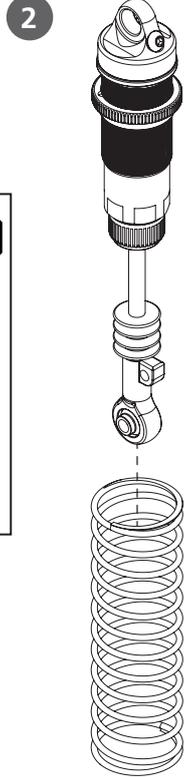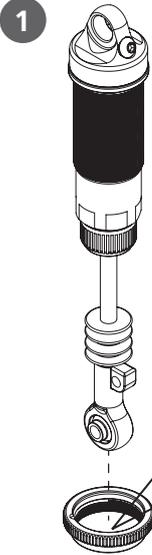

3

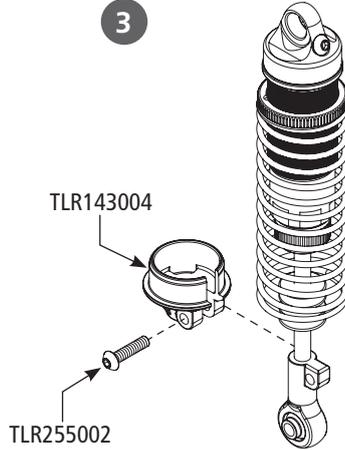

TLR143006 - FR
(Green)
TLR143007 - RR
(Orange)





D1

TLR6313 (x1)

TLR235007 (x3)


LOS242032 (x1)

TLR141000 (x1)



M3 Nylock Nut


M2.5 x 10mm FH

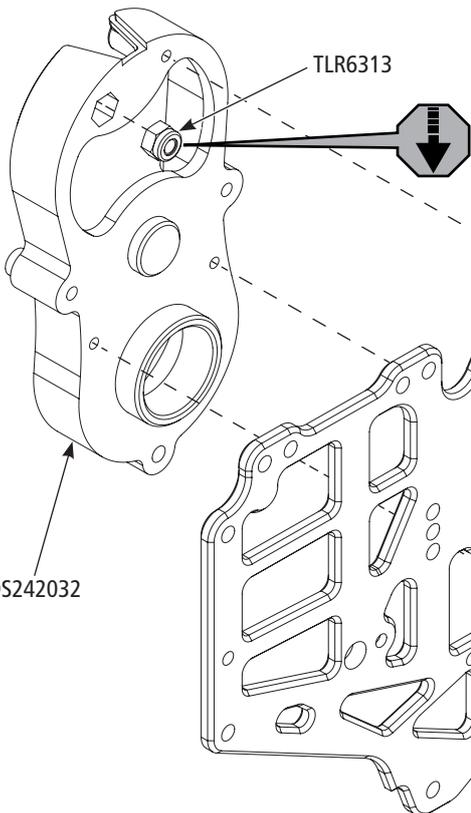



TLR141000




TLR235007

TLR235007









D2

- LOS246005 (x1)  C-Clip
- LOSA6940 (x2)  6 x 12 x 4mm BB
- LOS242043 (x1)  13T
- LOS242032 (x1) 

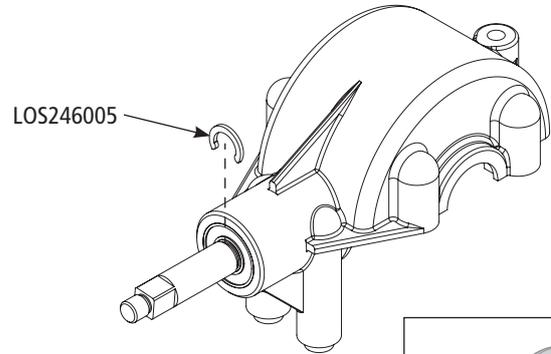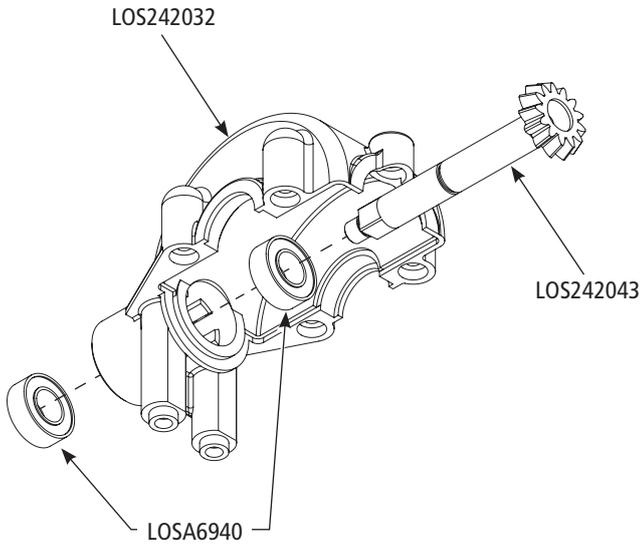


D3


- TLR5964 (x2)  M3 x 16mm FH
- TLR5963 (x2)  M3 x 12mm FH
- TLR5911 (x2)  M3 x 20mm BH
- LOS242032 (x1) 

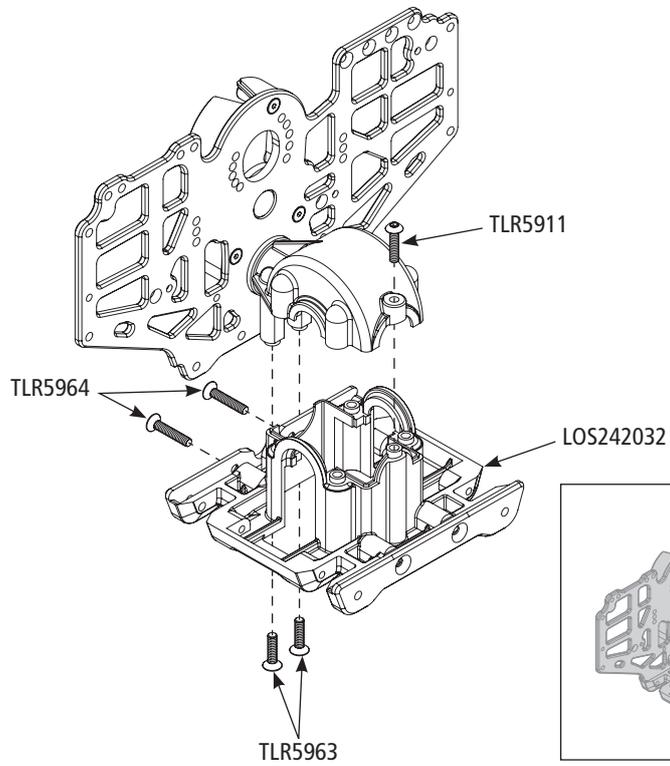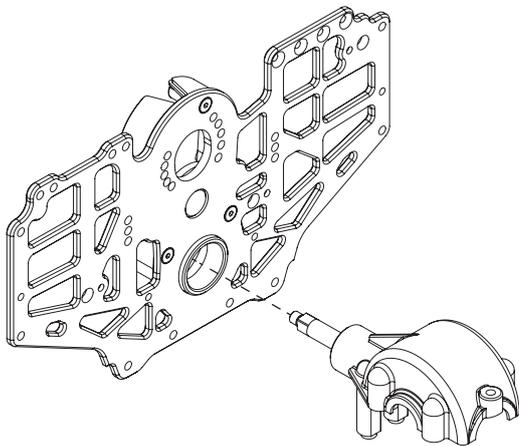

D4

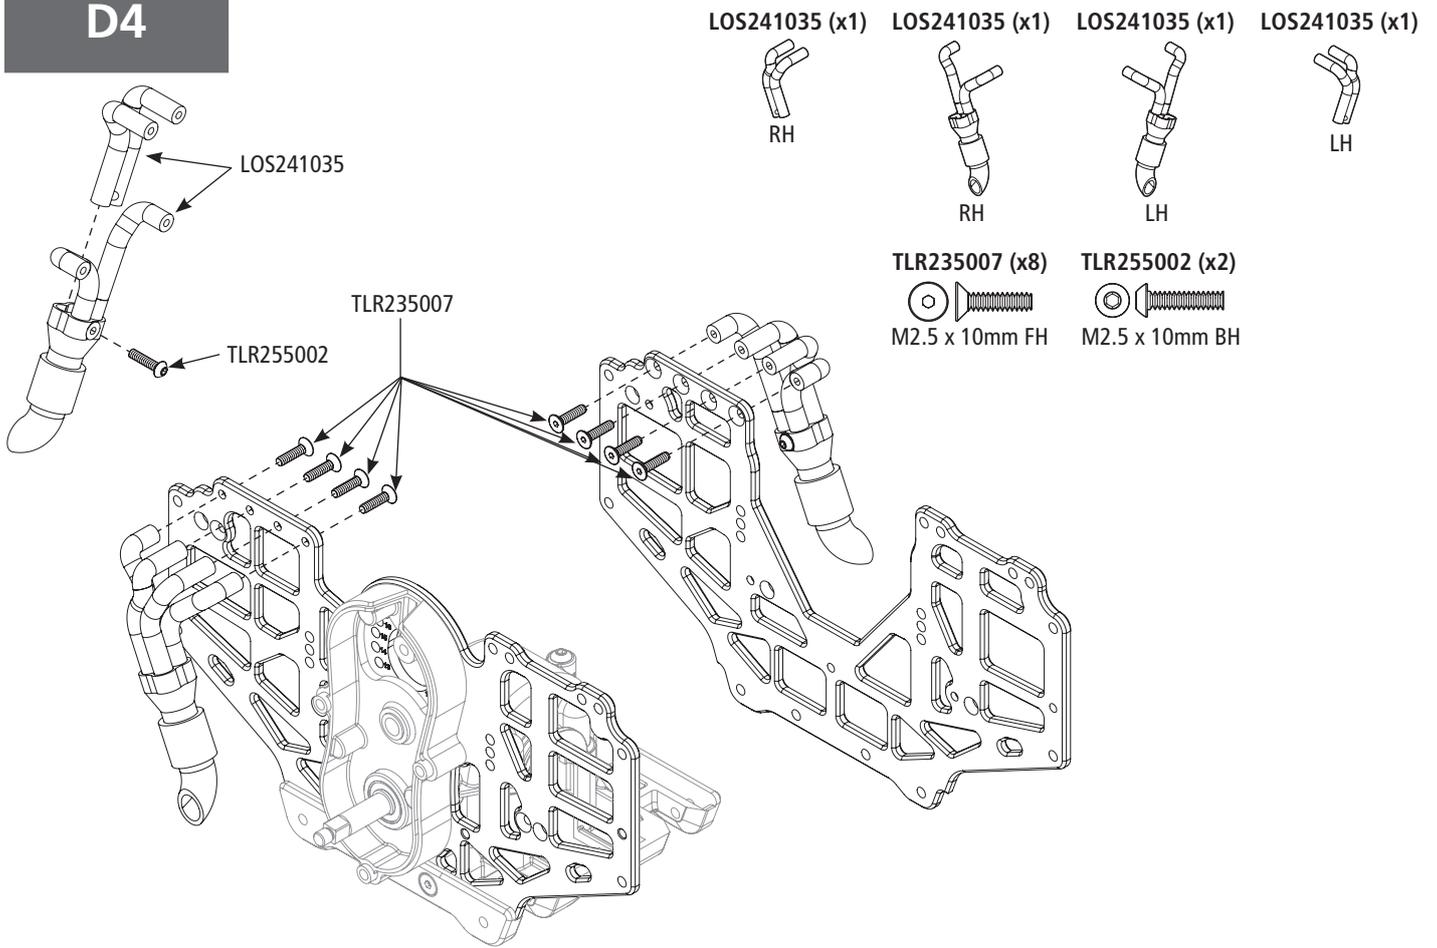




D5

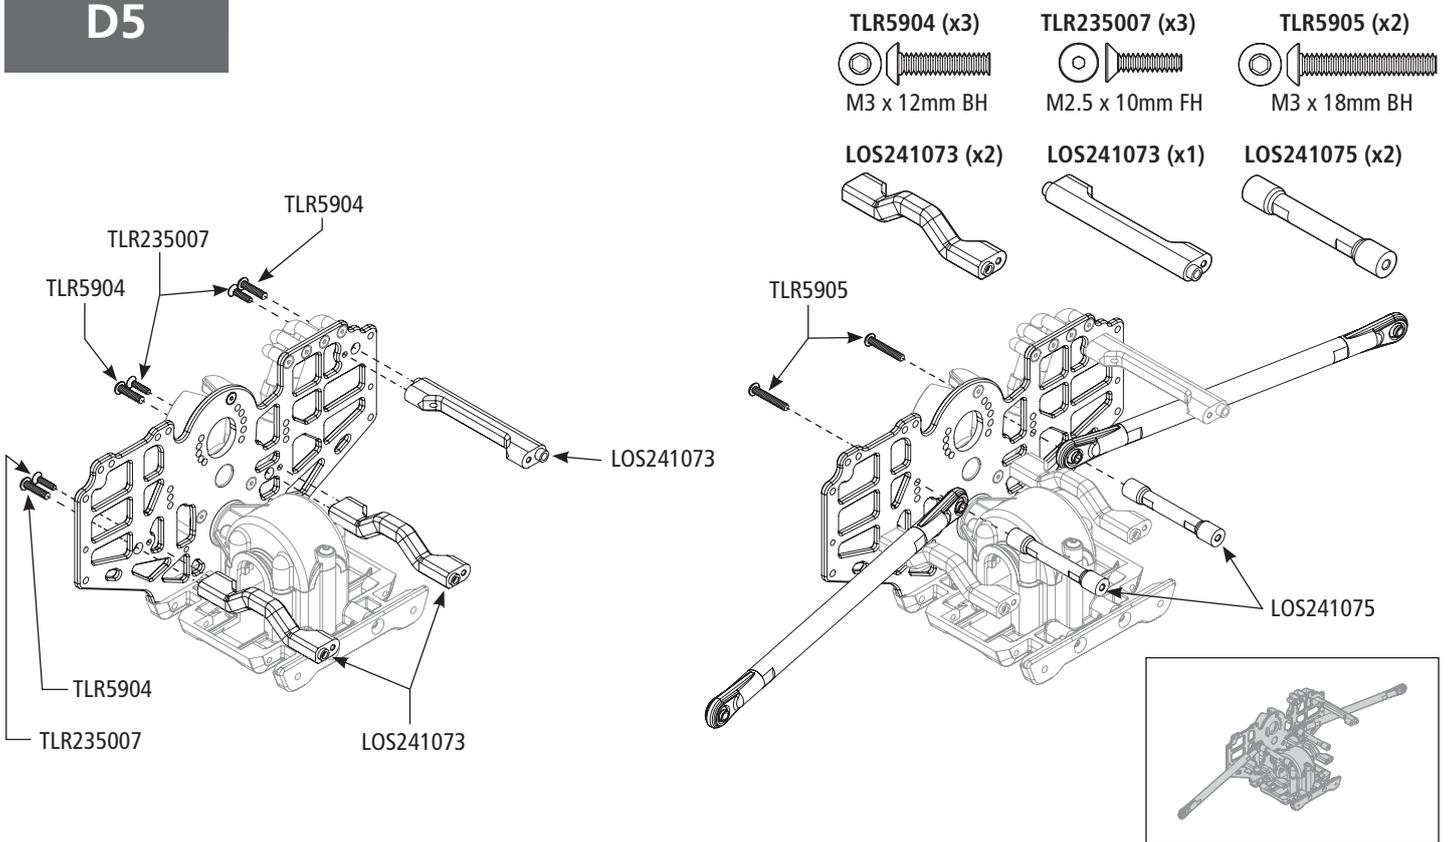

D6


TLR5904 (x2)

LOS241069 (x1)

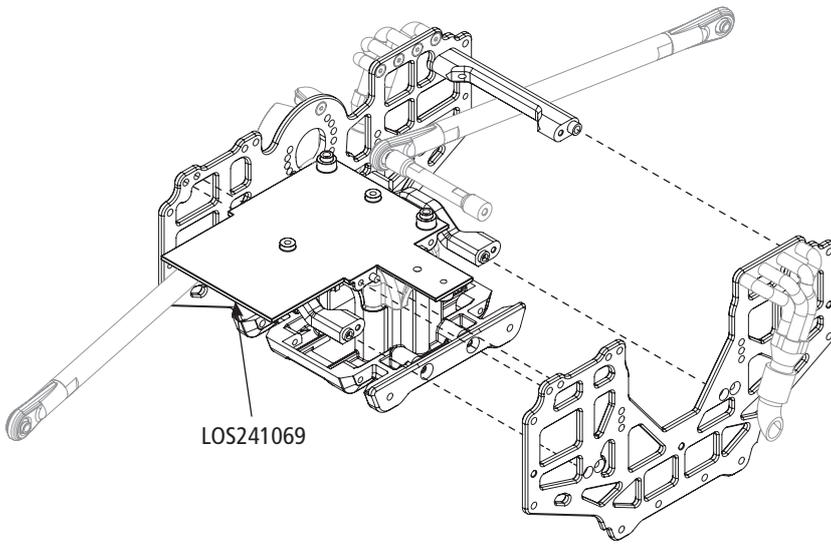


LOS241069

TLR5904

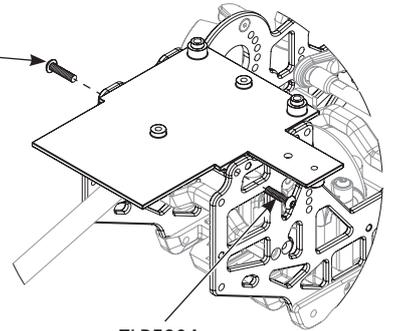

TLR5904




D7

TLR5905 x2


TLR5904 x3

TLR235007 x3


TLR5964 x2




M3 x 18mm BH




M3 x 12mm BH




M2.5 x 10mm FH



M3 x 16mm FH

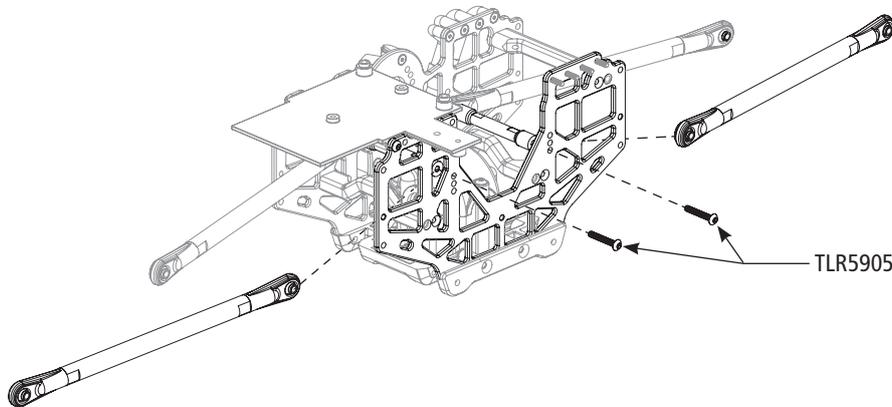

TLR5905

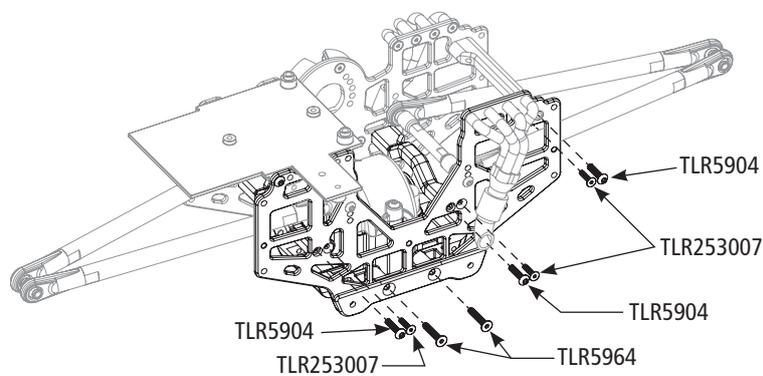

TLR5904


TLR235007

TLR5904

TLR5904









TLR235007

TLR5964



D8



TLR141000 (x2) LOS241072 (x4) LOS240029 (x2) LOS244006 (x1) LOS244006 (x2)

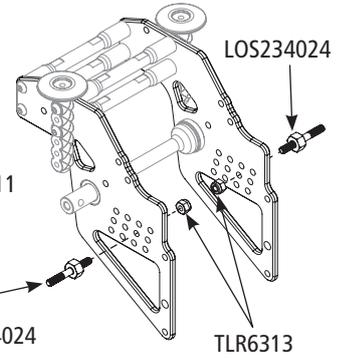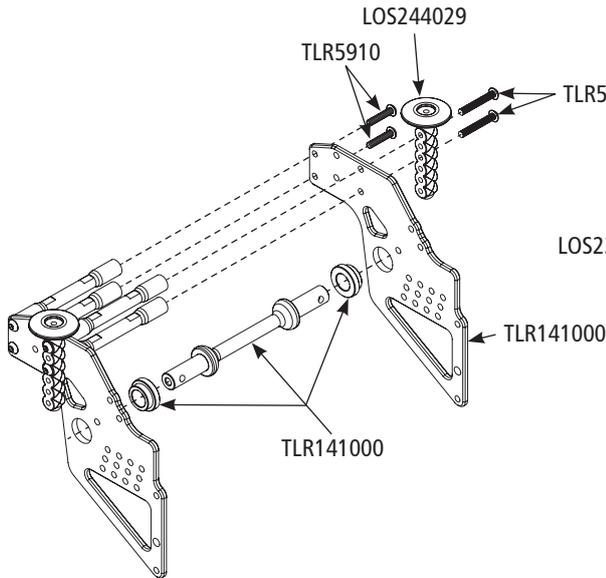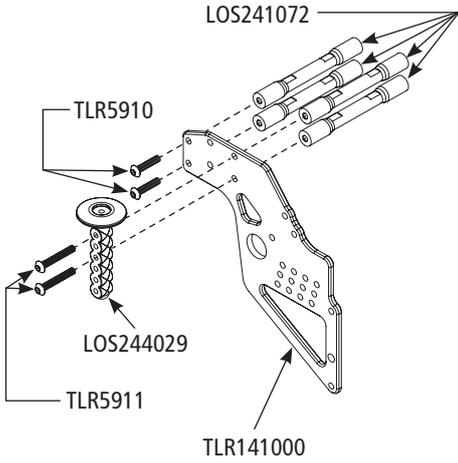









D9

TLR5903 (x4)
M3 x 10mm BH




TLR6313 (x4)
M3 Nylock Nut

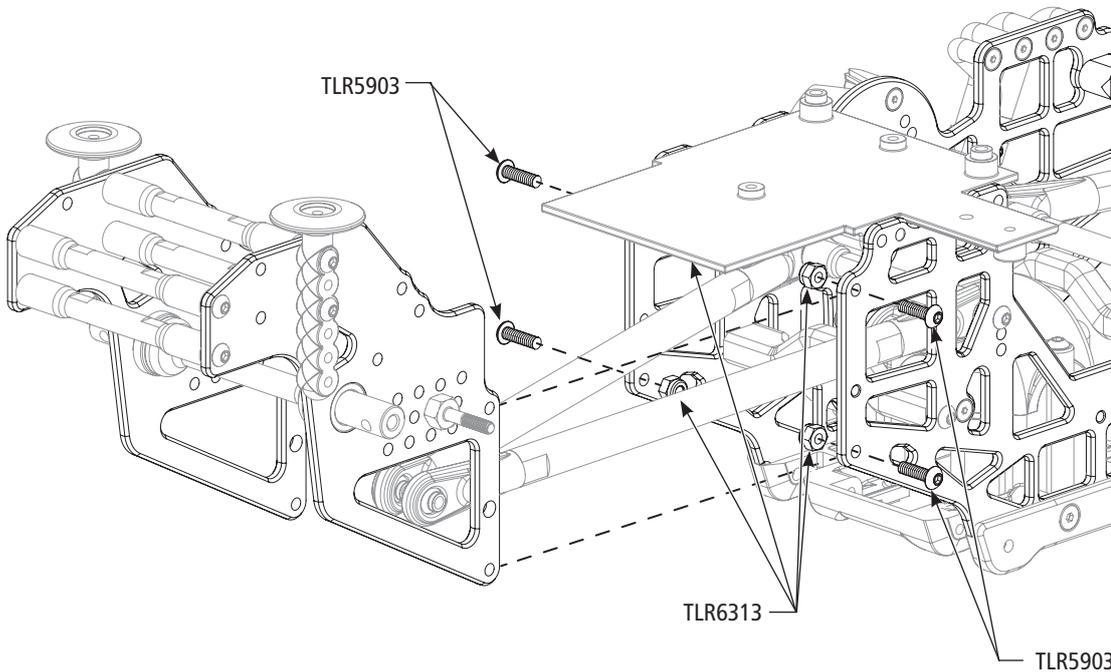

D10

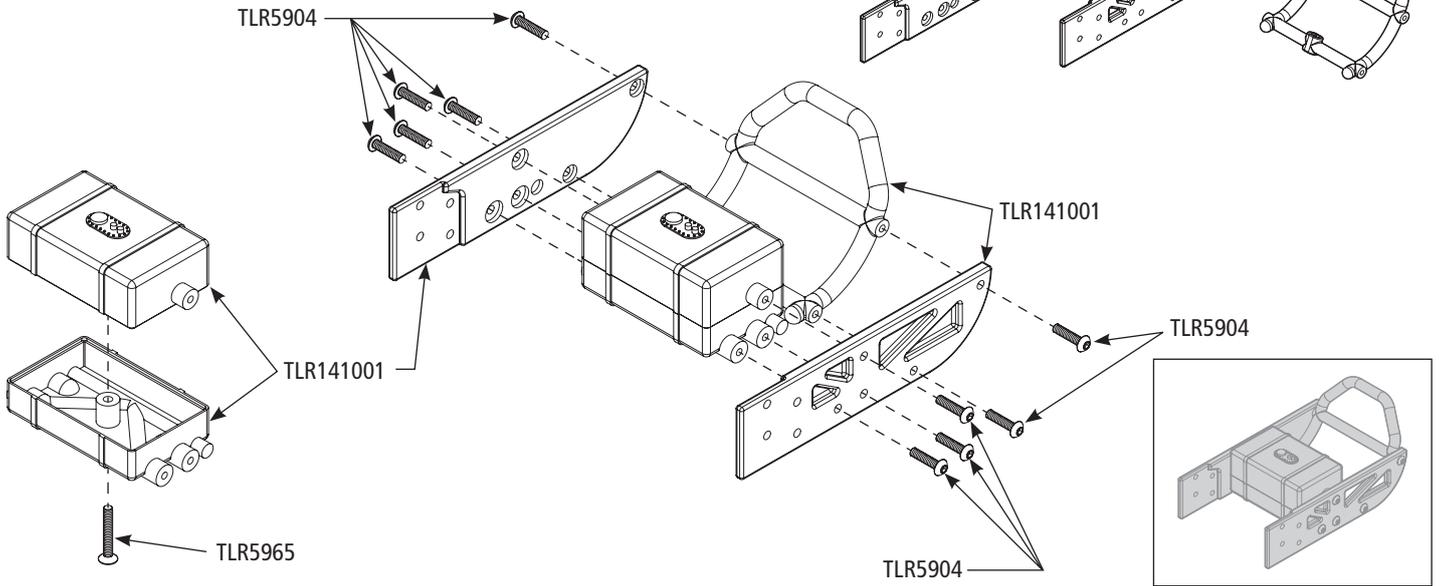


D11

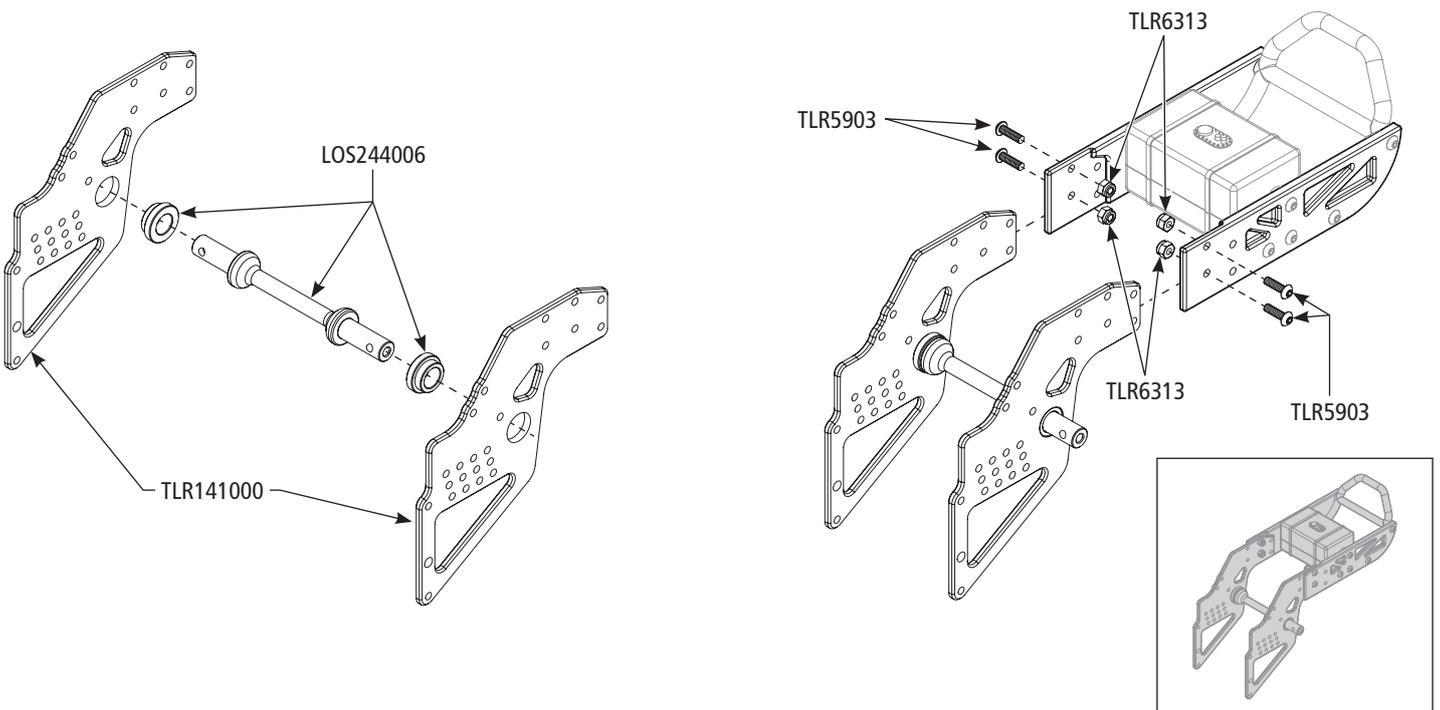


D12

TLR5910 (x4)




TLR5911 (x4)




TLR6313 (x2)





LOS234024 (x2)



LOS241072 (x4)




LOS240029 (x1)

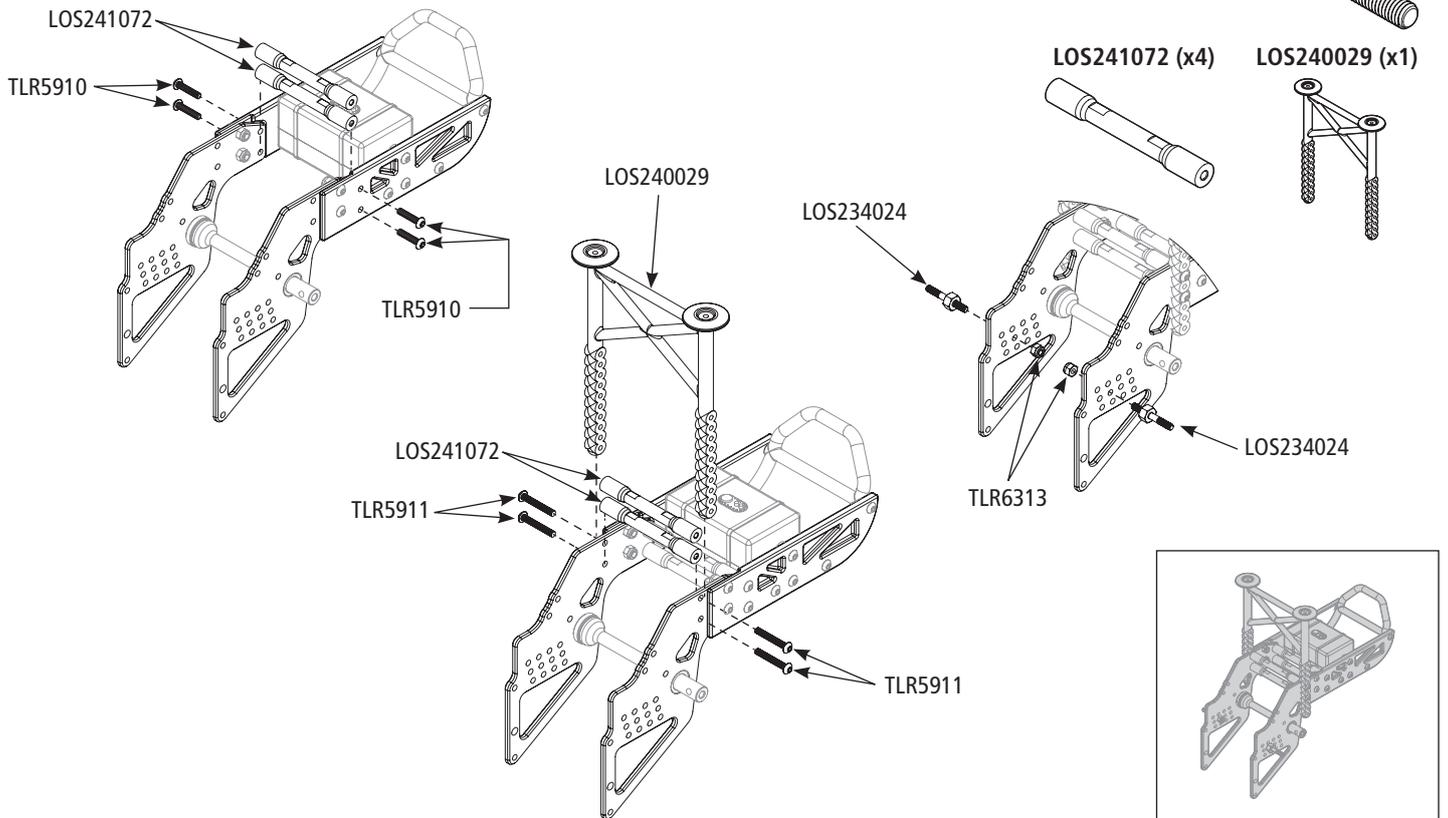


D13













TLR5903 (x4)













TLR6313 (x4)

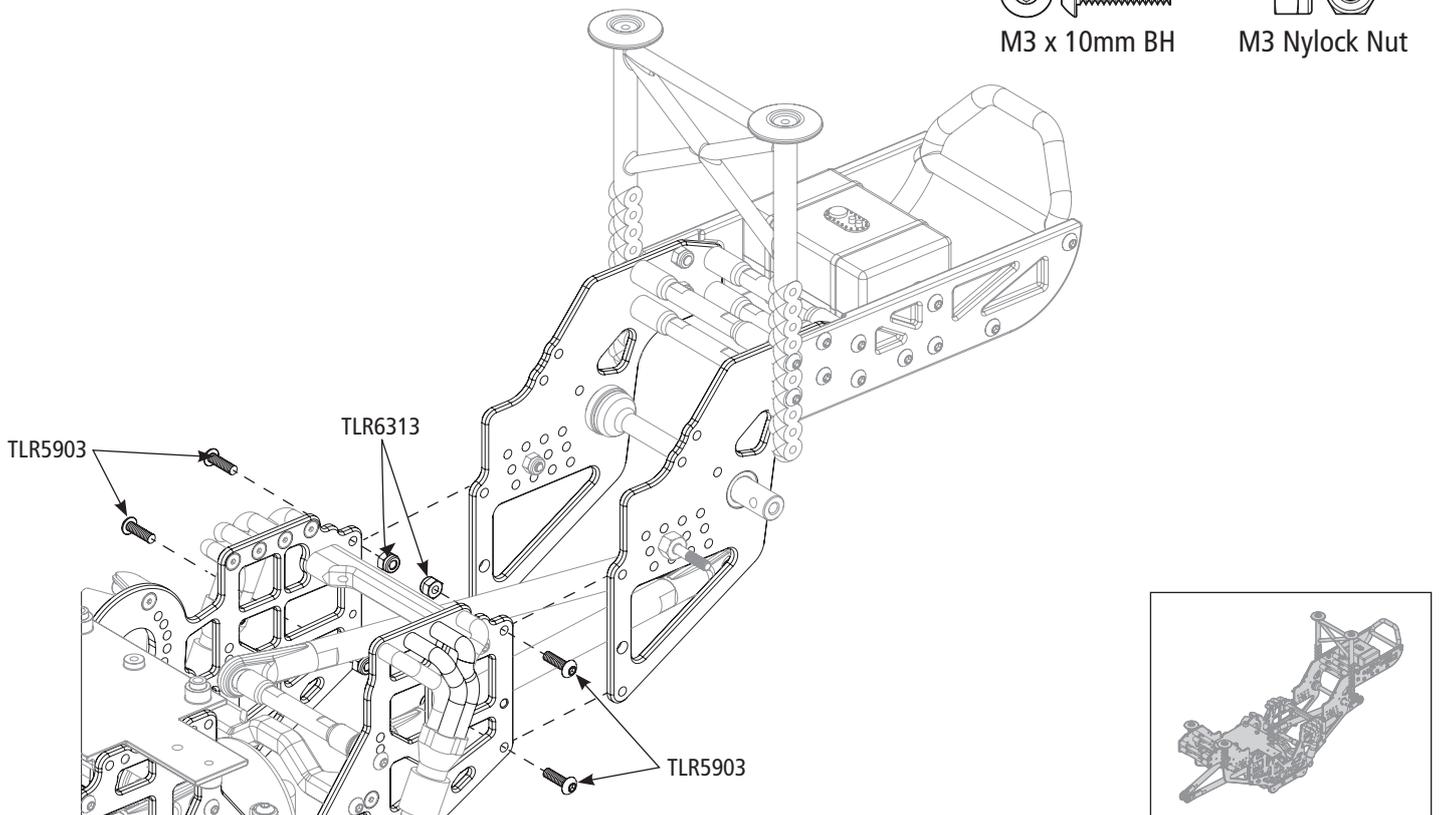



D14

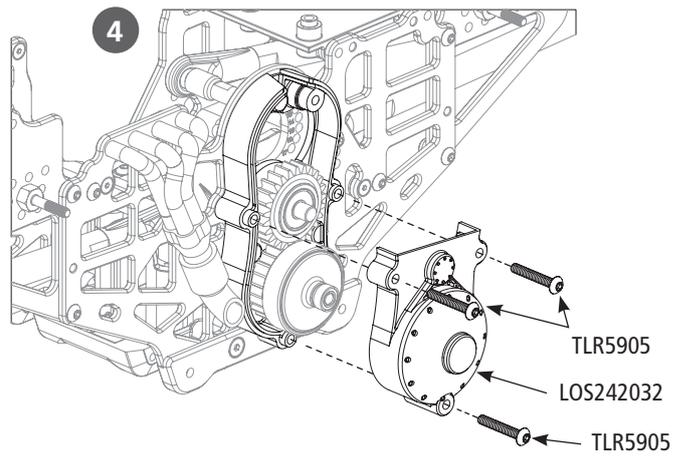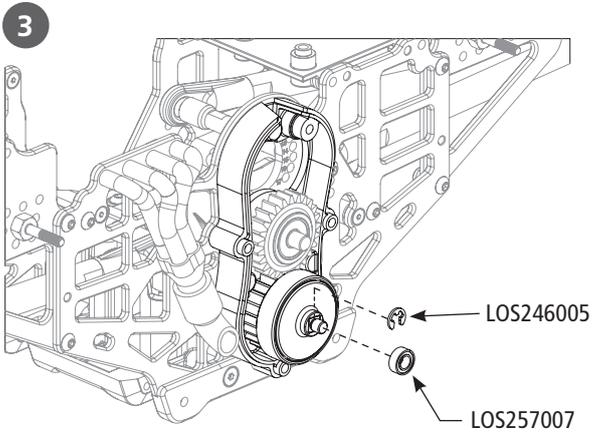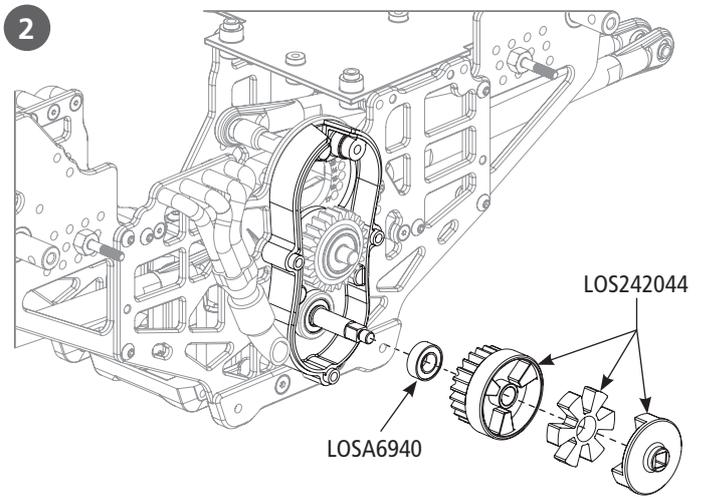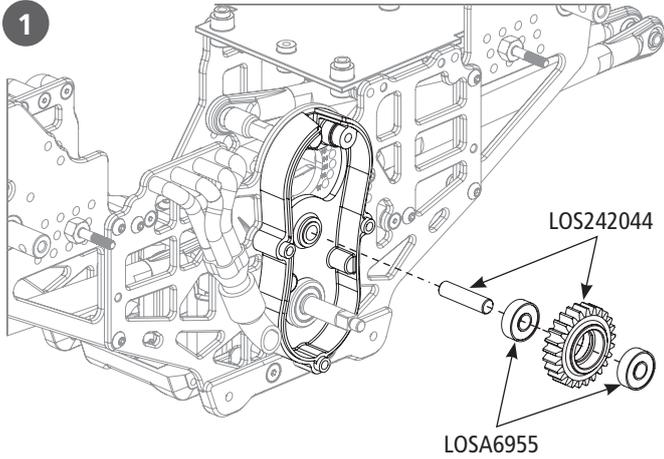







D15

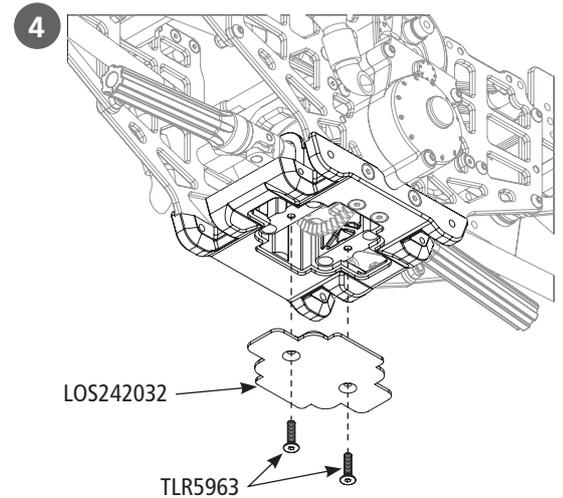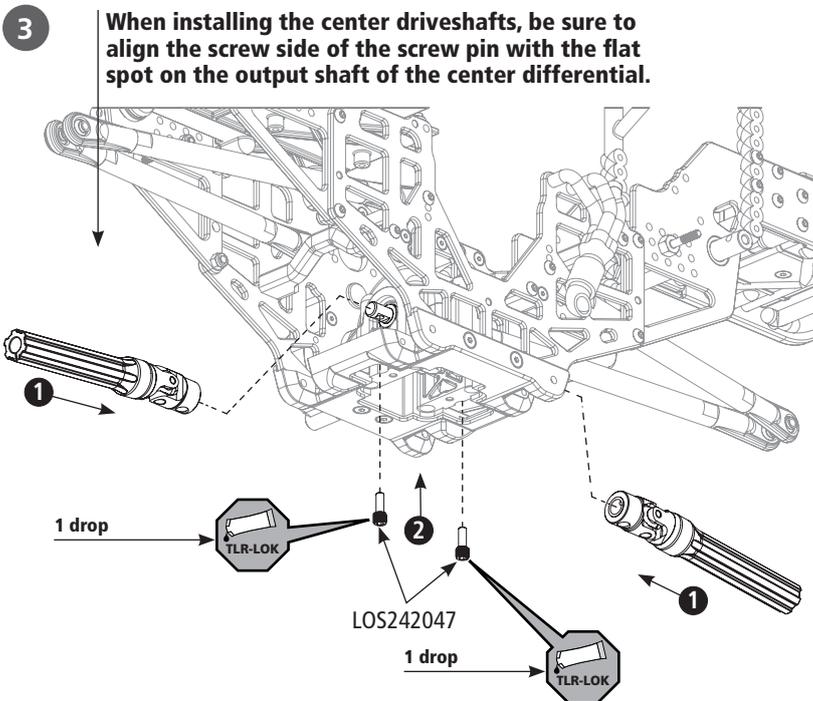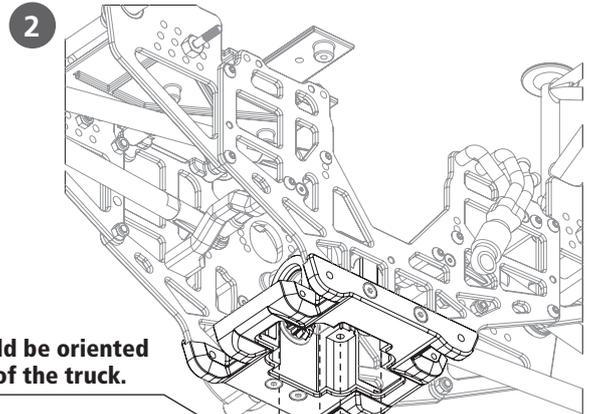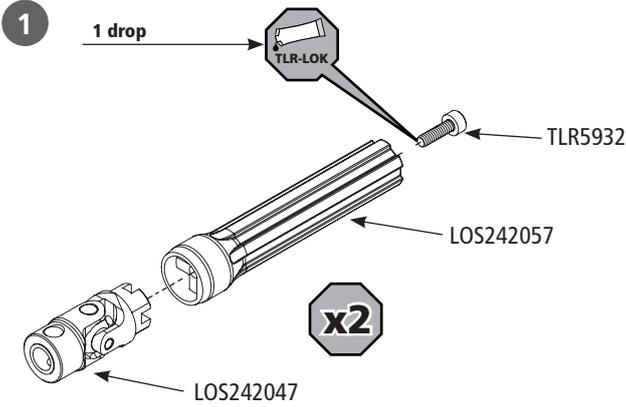


LOS235024 x4

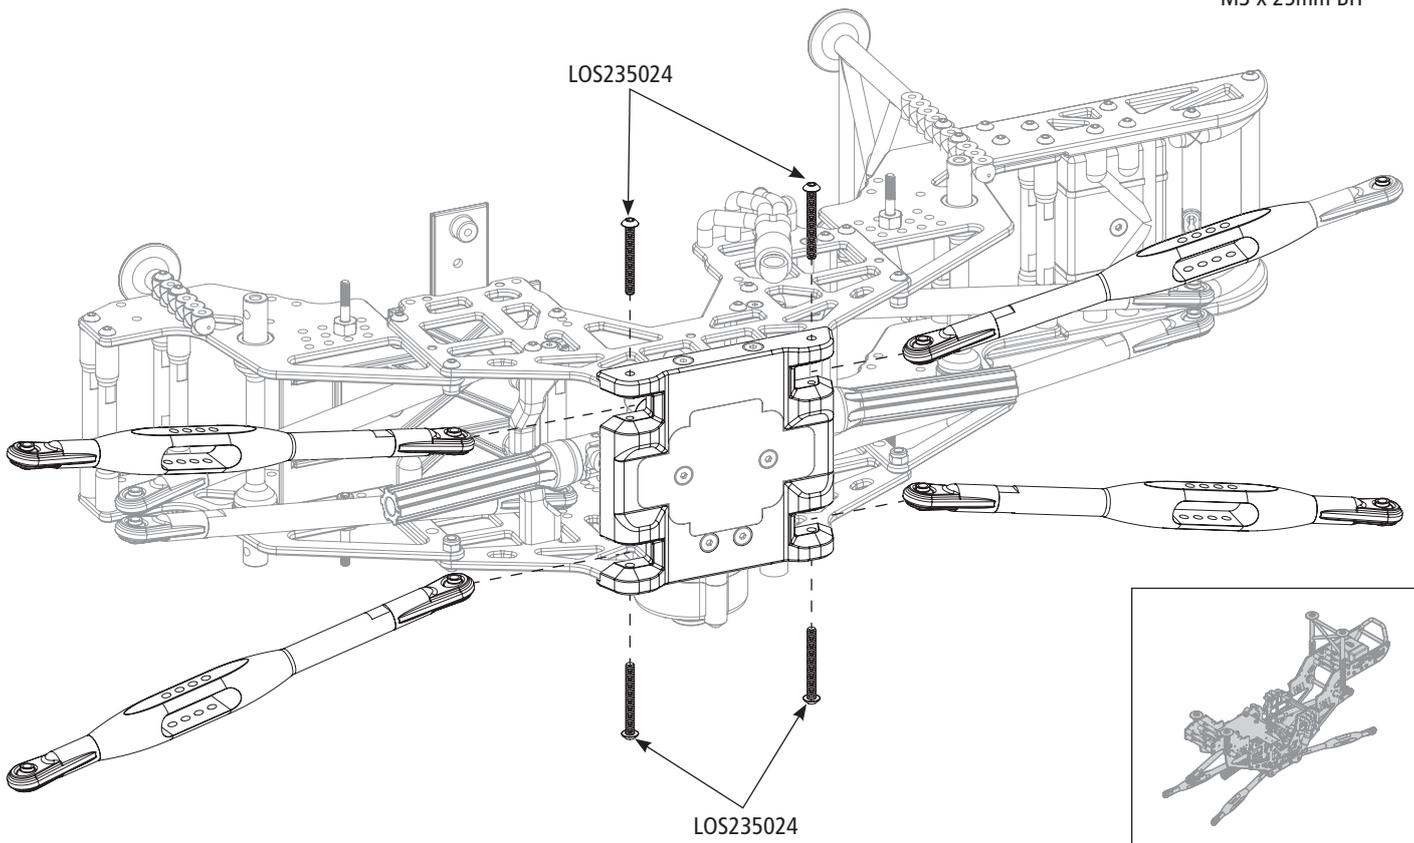

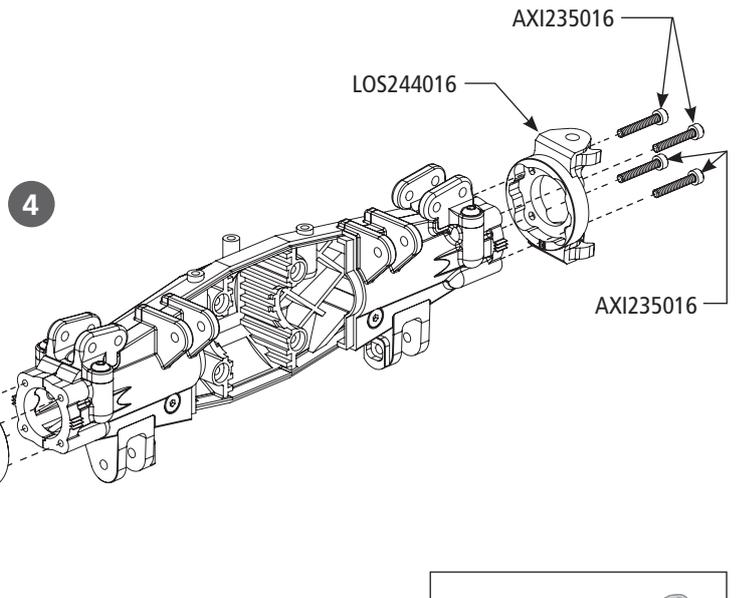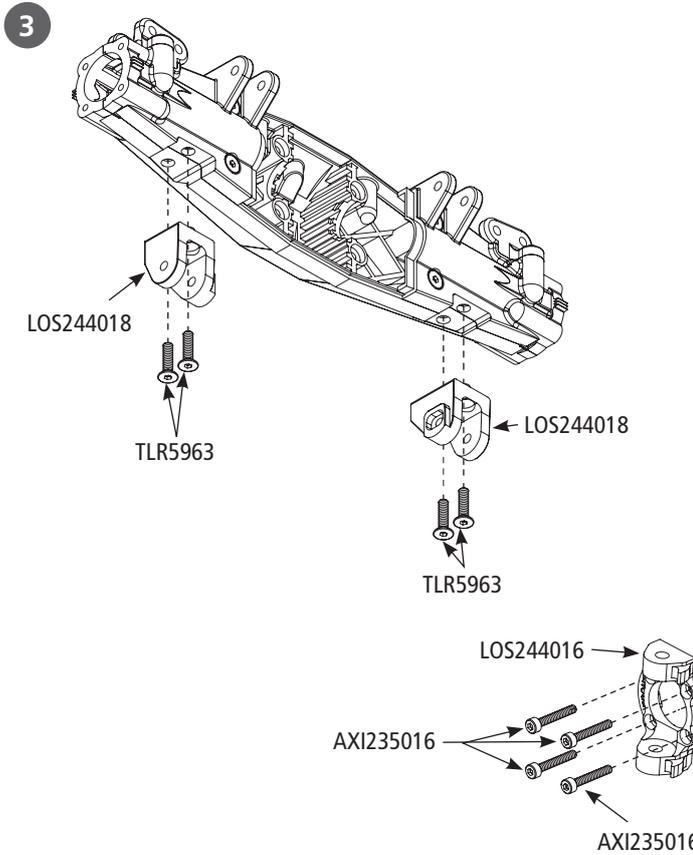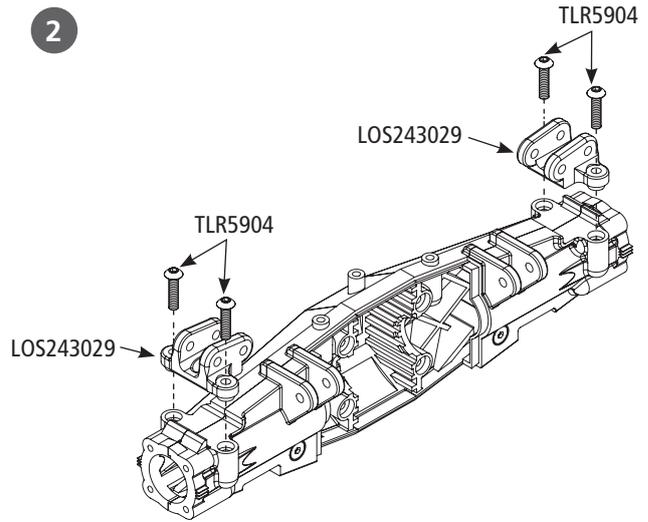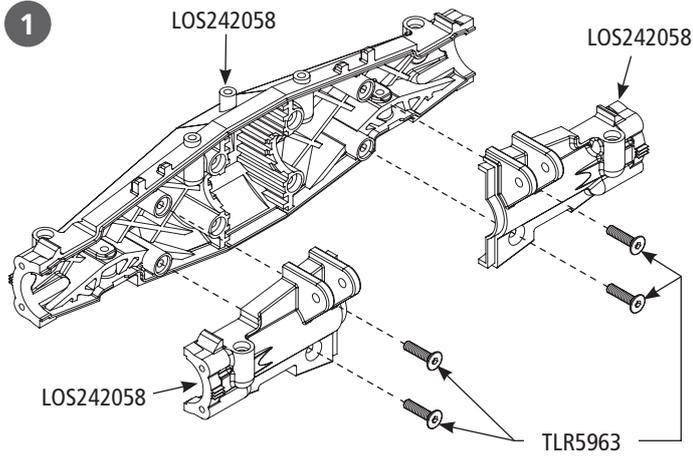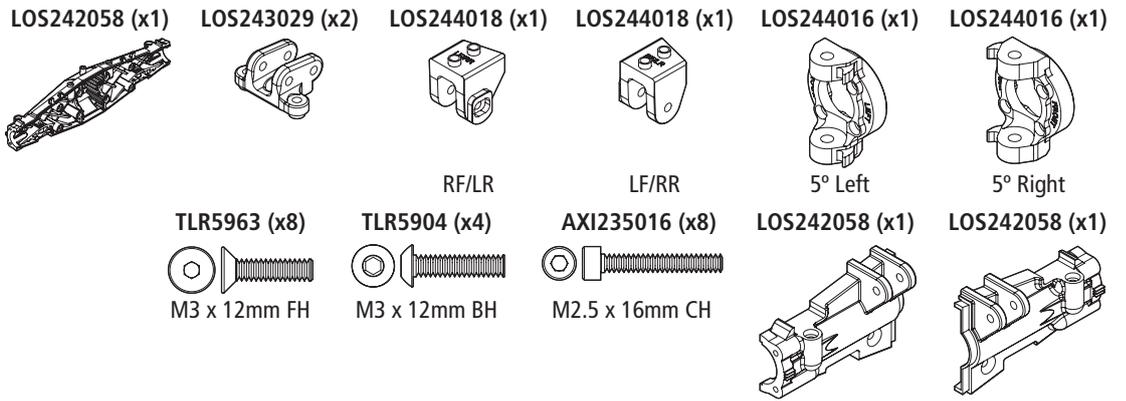


E2

LOS247001 (x2)




6 x 15 x 5mm BB

TLR5932 (x2)




M3 x 10mm CH

TLR5934 (x4)




M3 x 16mm CH

LOS242047 (x1)




LOS242042 (x1)




13T





LOS242058 (x1)




LOS242057 (x1)



LOS242056 (x1)

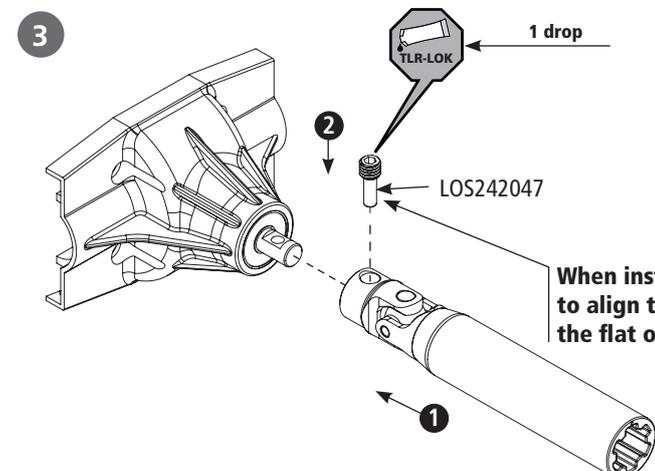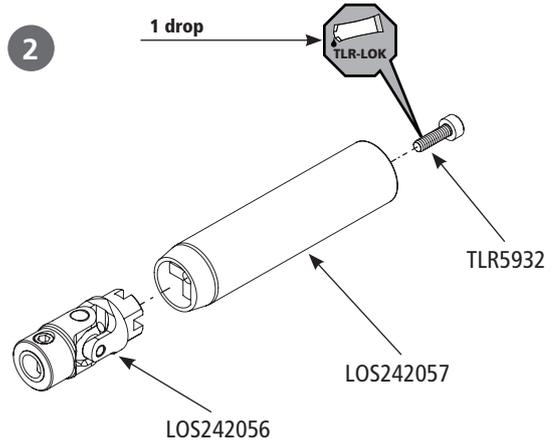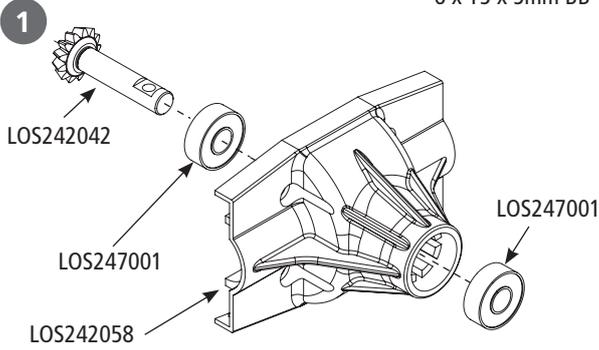


When installing the center drive shaft, be sure to align the screw side of the screw pin with the flat on the out put of the pinion gear.

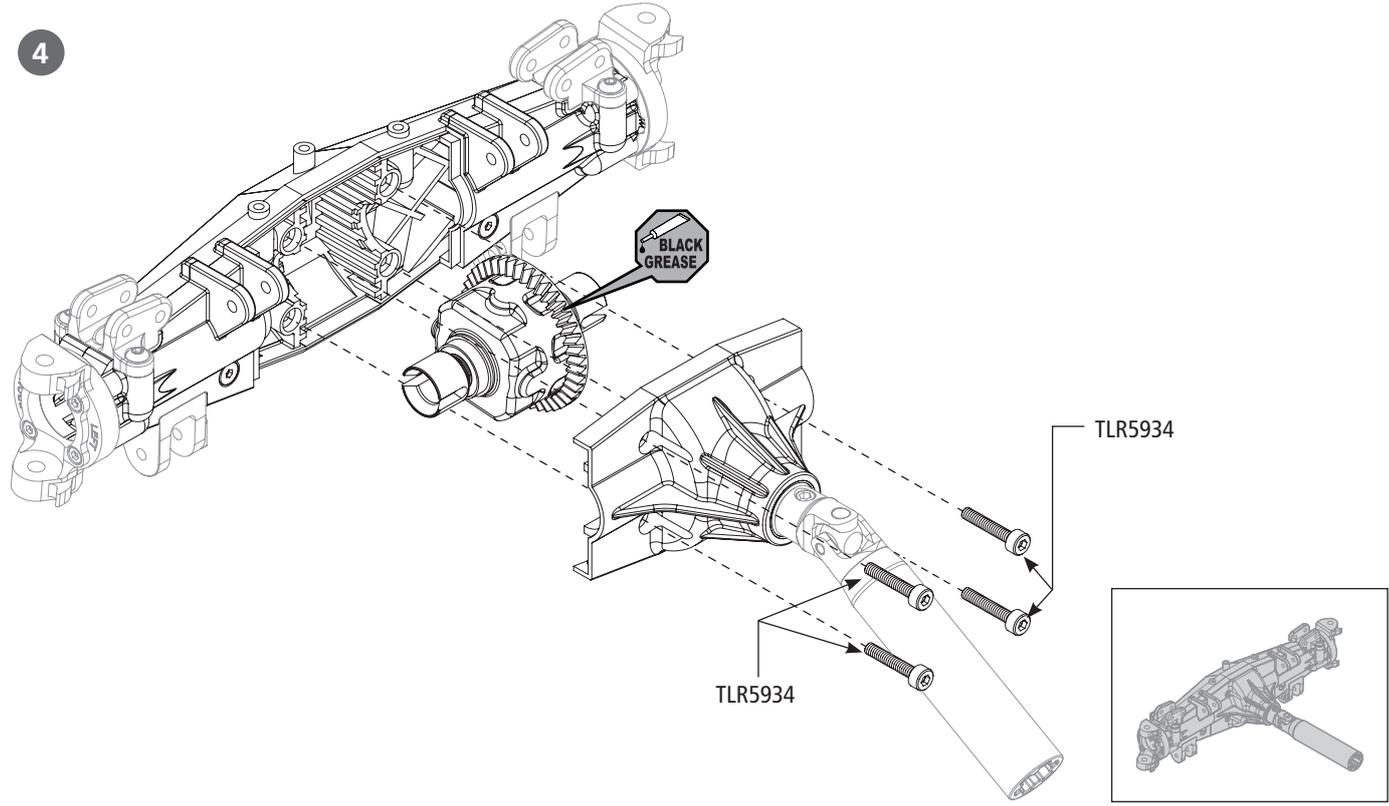

E3

LOS247000 (x4)




6 x 13 x 5mm BB

TLR255003 (x4)




M2.5 x 6mm CH

LOS242029 (x2)



LOS244005 (x4)




LOS242053 (x2)



17mm

LOS242048 (x2)




TLR144002 (x1)







Left

TLR144002 (x1)



Right

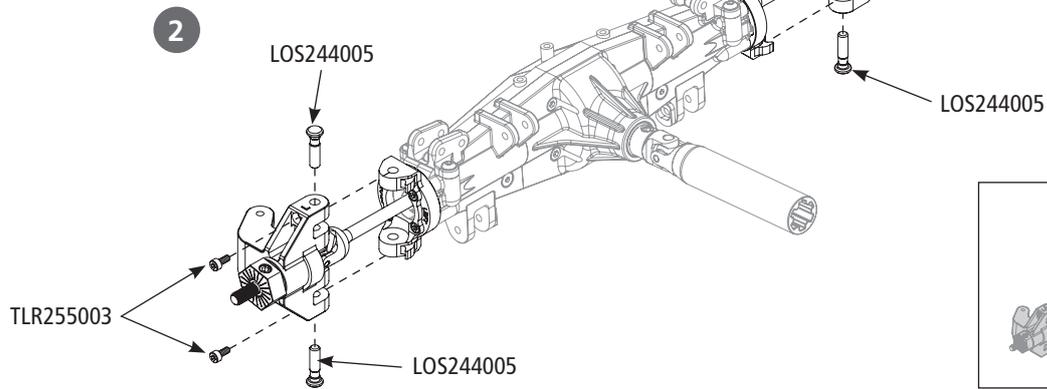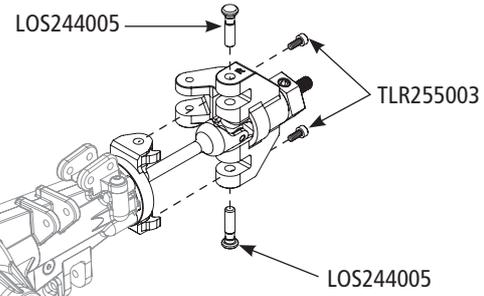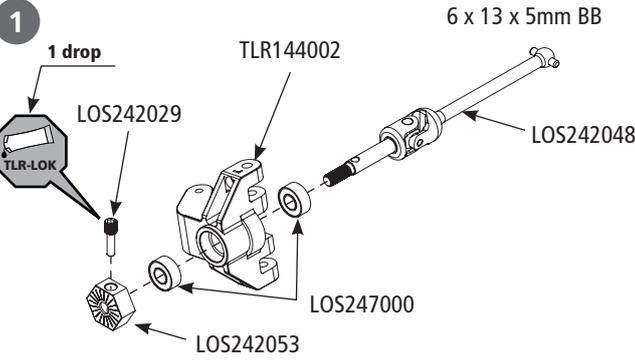

E4

TLR6313 (x4)



M3 Nylock Nut

TLR5904 (x2)



M3 x 12 BH

TLR5911 (x2)




M3 x 20 BH





LOS241030 (x2)




LOS243030 (x1)



LOS241030 (x1)

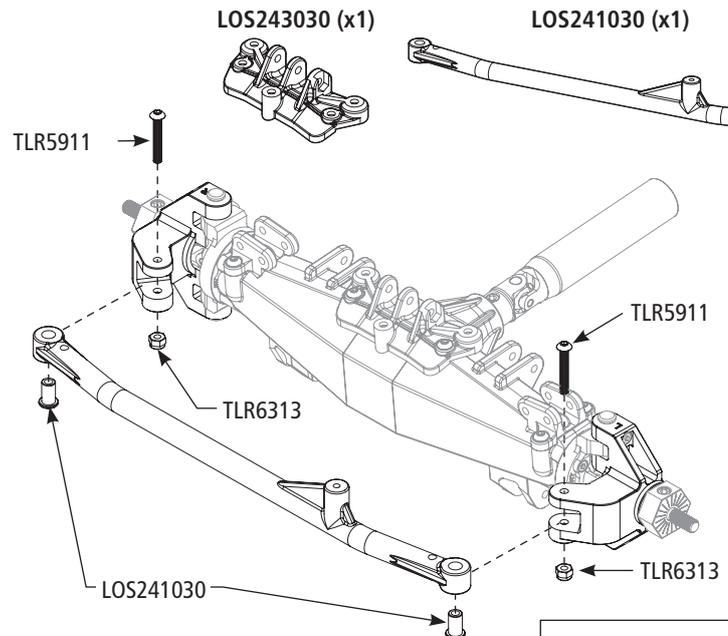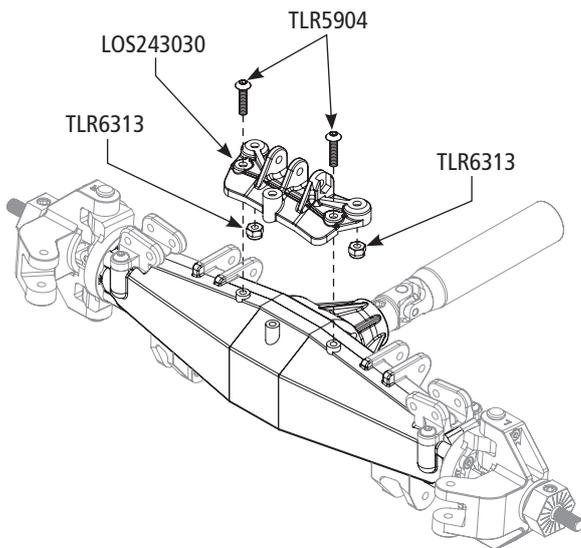

TLR5904 (x4)

 M3 x 12mm BH

TLR5963 (x8)







 M3 x 12mm FH



LOS242058 (x1)


LOS244018 (x1)

LOS242018 (x1)

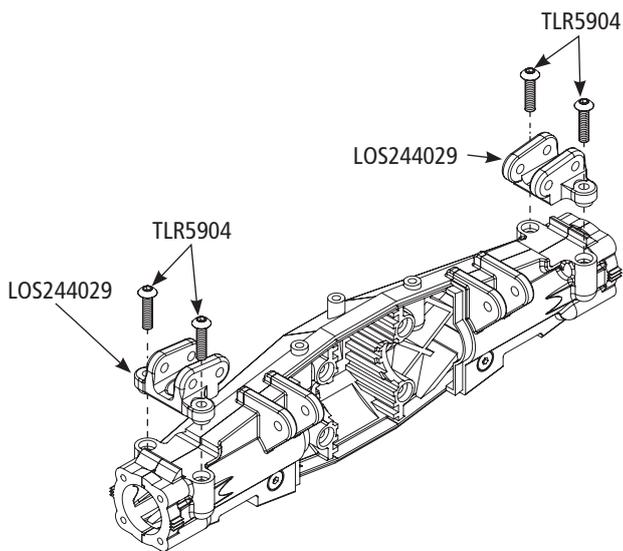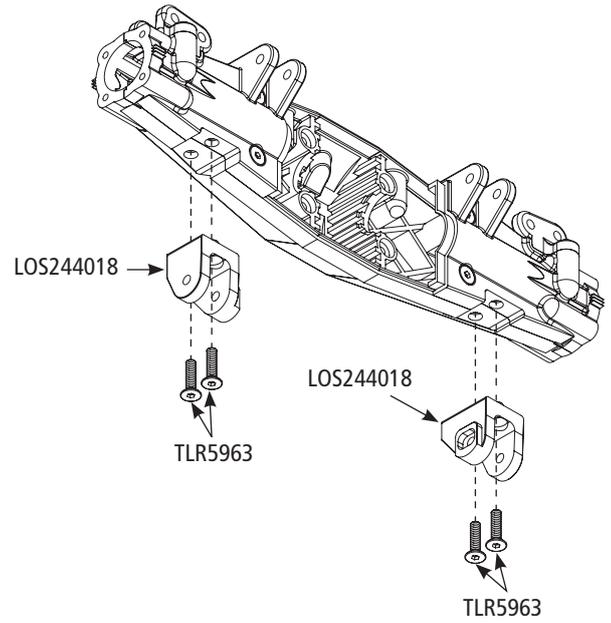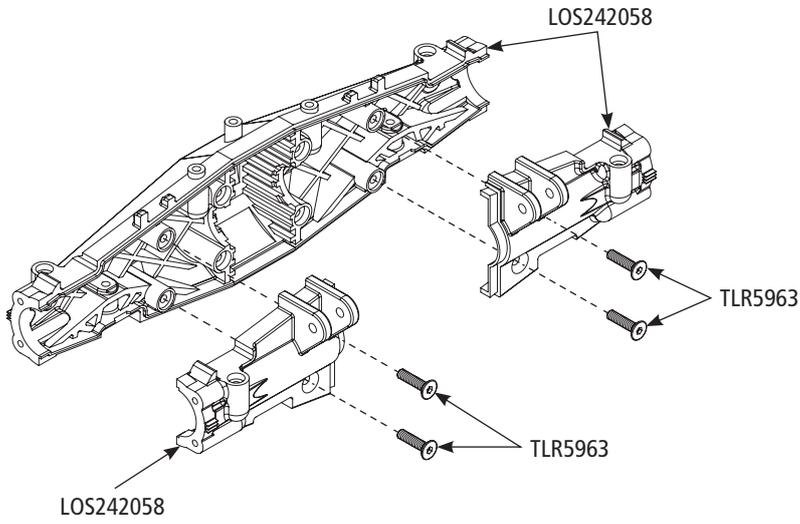


F2

LOS247001 (x2)




6 x 15 x 5mm BB

TLR5932 (x1)




M3 x 10mm CH

TLR5934 (x4)




M3 x 16mm CH

LOS242047 (x1)




LOS242042 (x1)




13T


LOS242058 (x1)





LOS242057 (x1)




LOS242056 (x1)

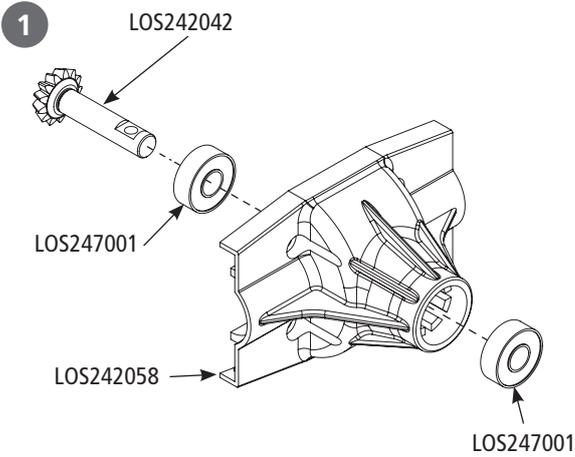

2

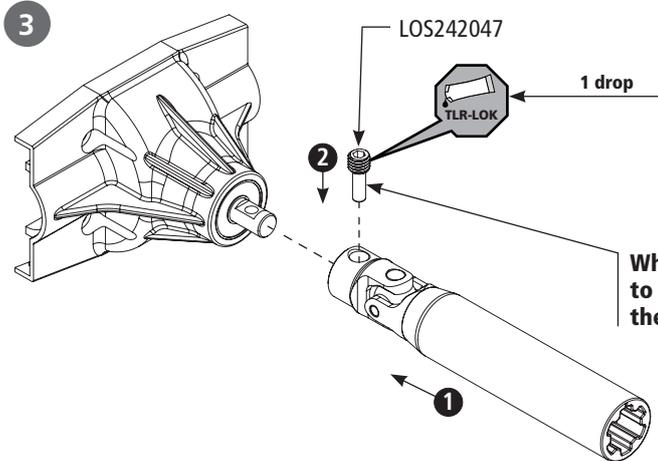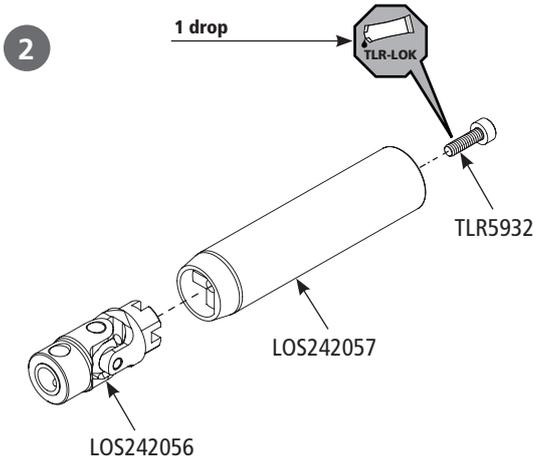

When installing the center drive shaft, be sure to align the screw side of the screw pin with the flat on the out put of the pinion gear.

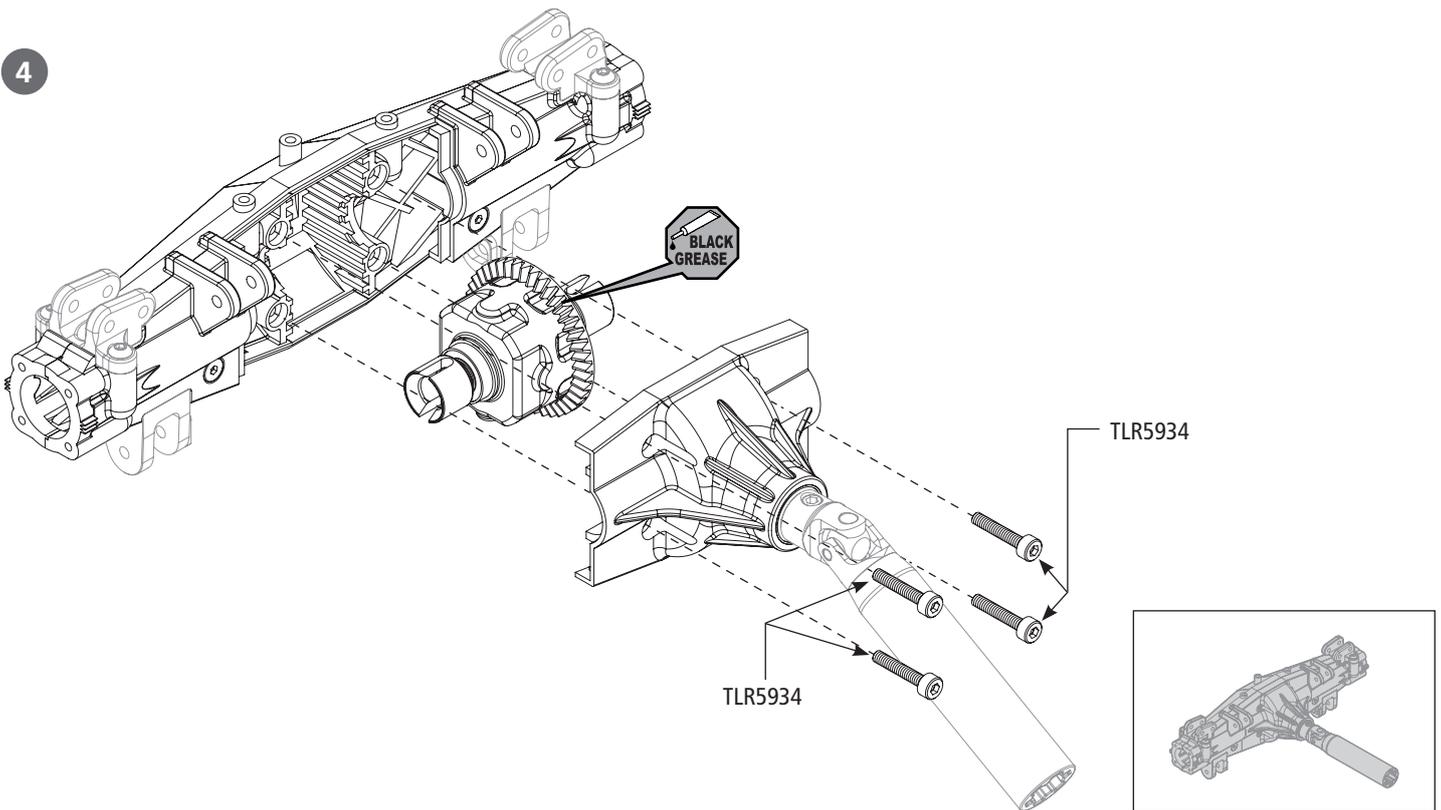

LOS242053 (x2)



17mm

LOS242051 (x2)




TLR144003 (x2)




3 deg

LOS242049 (x2)



LOS24030 (x1)




LOS247000 (x4)



6 x 13 x 5mm BB

TLR5904 (x3)




M3 x 12mm BH

AXI235016 (x8)



M2.5 x 16mm CH

LOS242053 (x2)

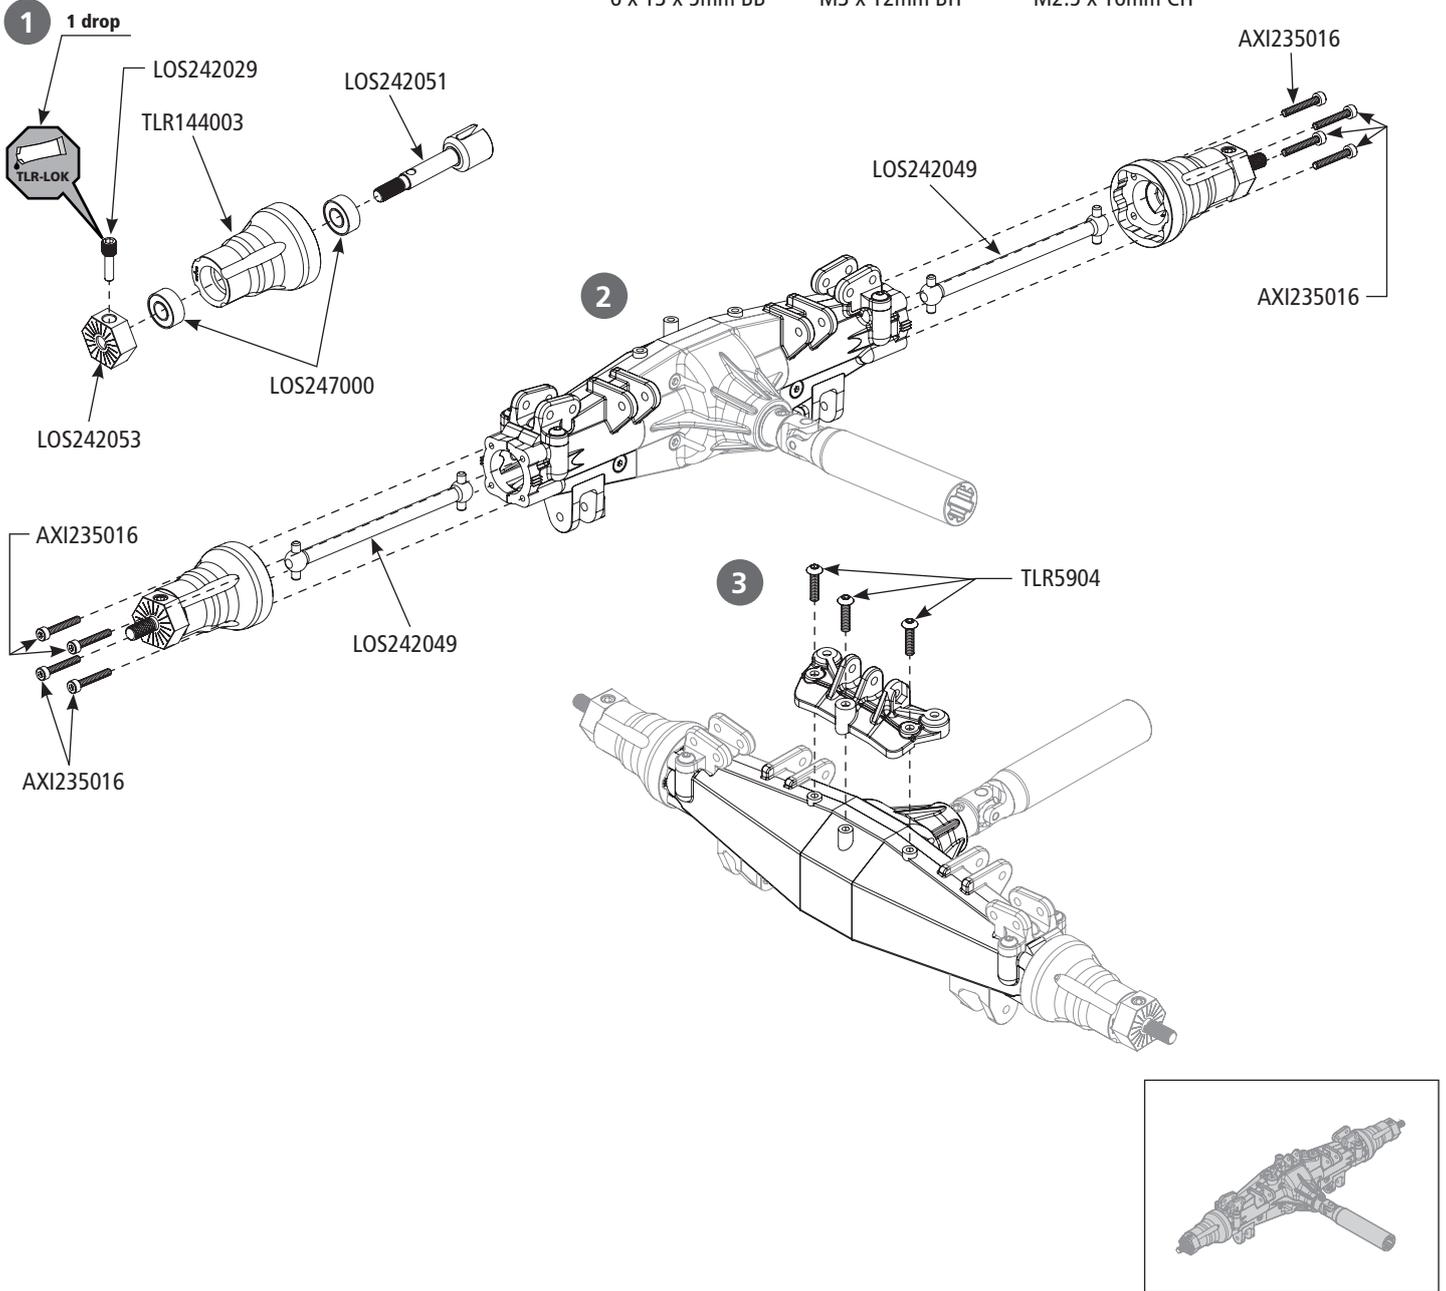


F4

TLR5911 (x2)
M3 x 20mm BH


LOS235025 (x1)
M3 x 30mm BH

TLR6313 (x3)
M3 Nylock Nut



1

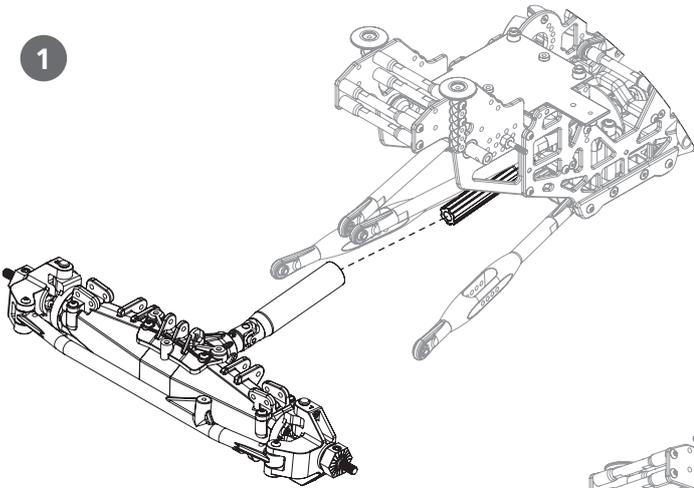

2

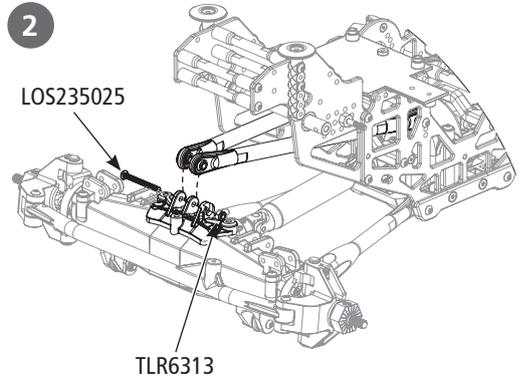

3

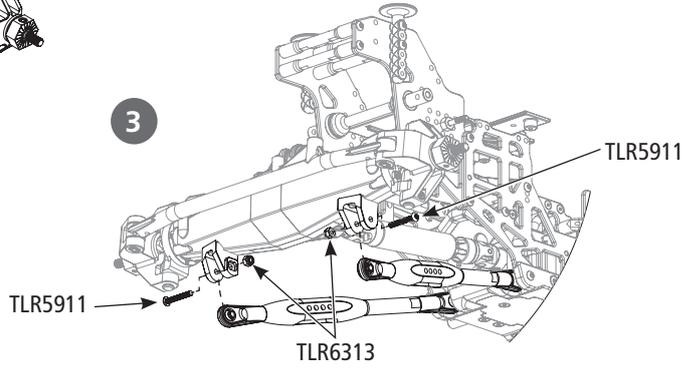


F5

TLR5911 (x2)
M3 x 20mm BH


LOS235025 (x1)
M3 x 30mm BH

TLR6313 (x3)
M3 Nylock Nut



1

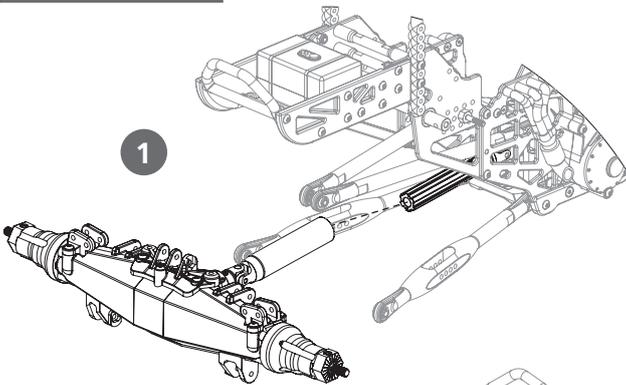

2

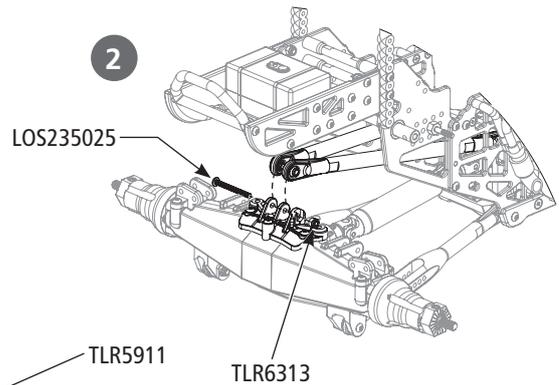


3

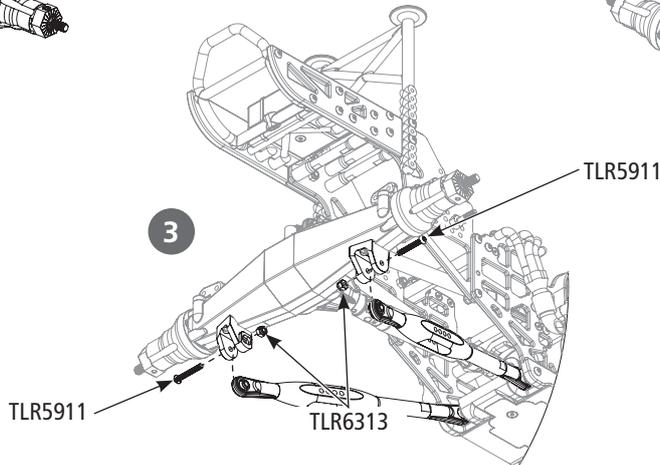

- | | | | | |
|--|---|---|--|---|
| TLR5904 (x4)

M3 x 12mm BH | TLR5909 (x1)


M3 x 16mm BH | TLR5911 (x1)





M3 x 20mm BH | TLR5965 (x3)

M3 x 20mm BH | TLR5930 (x1)

M3 x 8mm CH |
| LOS236001 (x6)



M3 Washer | TLR6313 (x1)

M3 Nylock Nut | LOS244010 (x2)

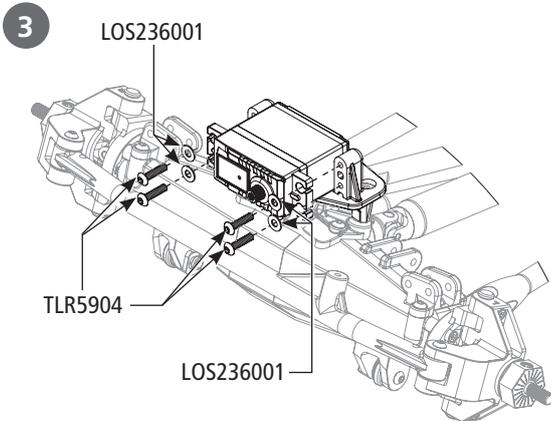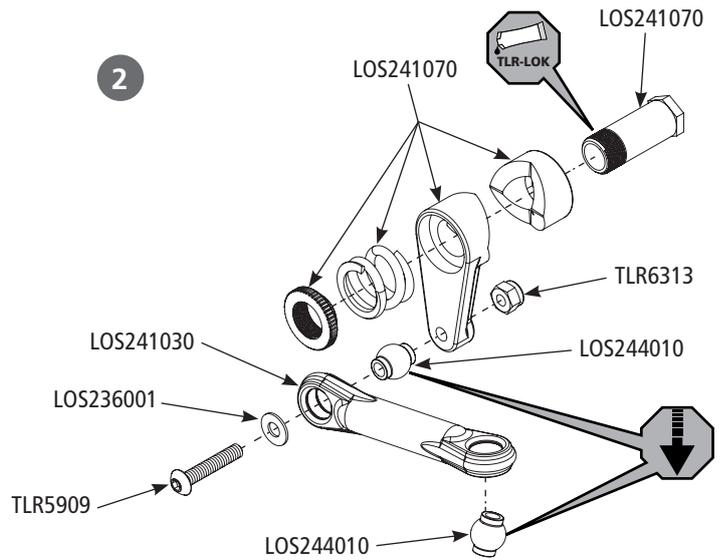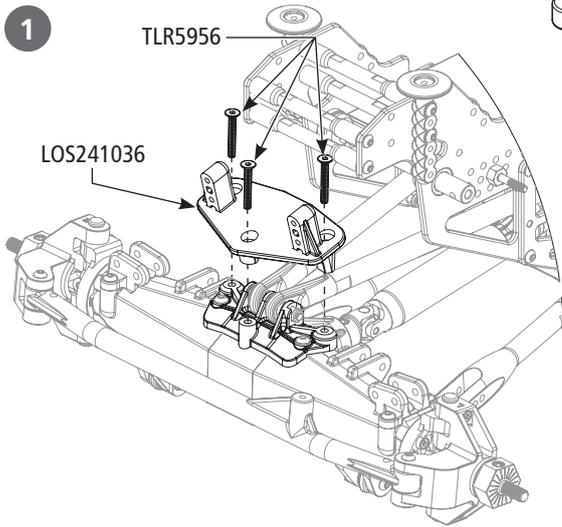7mm | LOS241036 (x1)
 | LOS241030 (x1)
 |
| LOS241070 (x1)
 | LOS241070 (x1)
 | LOS241070 (x1)
 | LOS241070 (x1)
 | LOS241070 (x1)
 |



Optional:
LOS241071
25T Helical Servo Saver Assembly (not included)

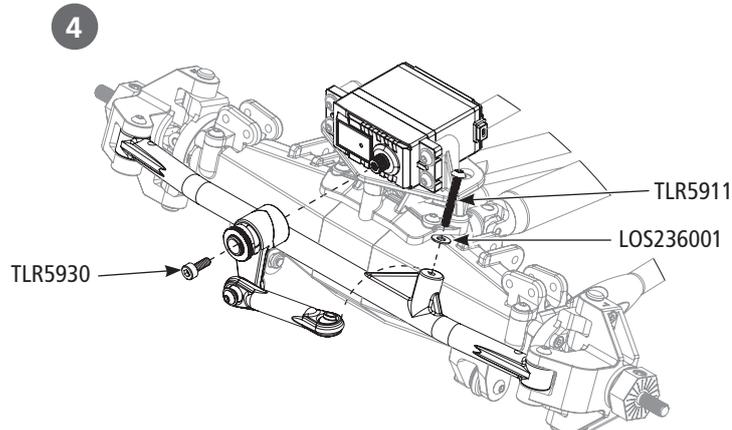


G2

TLR255015 (x4)



M4 x 6 Setscrew

TLR5905 (x8)



M3 x 18 BH

TLR255055 (x4)



M4 x 8 BH

TLR6313 (x4)



M3 Nylock Nut

LOS244010 (x8)



7mm


LOS244006 (x4)

LOS244006 (x4)

LOS244015 (x4)

LOS244011 (x4)

LOS244006








TLR255015

LOS244010


LOS244011

LOS244010

2.5mm

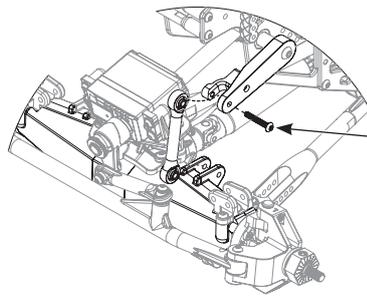

TLR5905

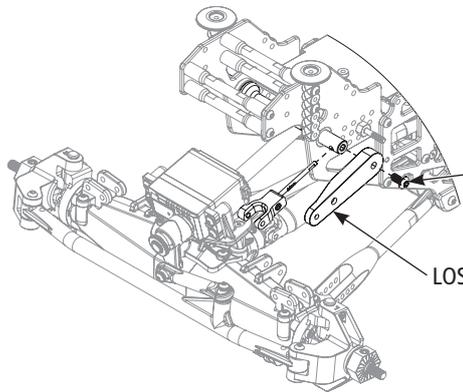

TLR255005

LOS244015

TLR5905

TLR6313

G3

TLR5905 (x4)



M3 x 18mm BH

TLR6313 (x4)




M3 Nylock Nut

TLR143003 (x4)




TLR143003

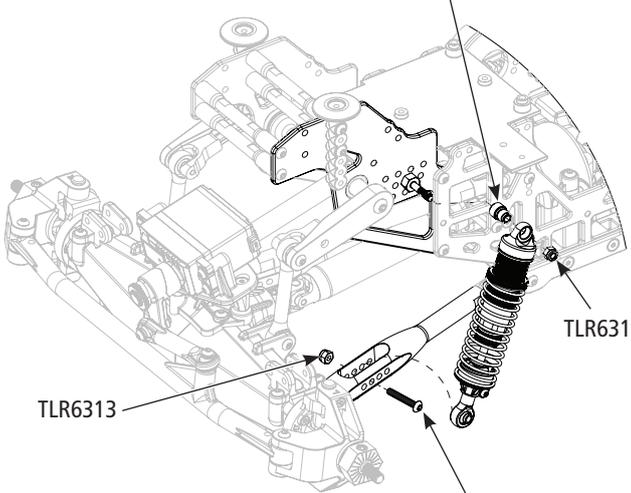

TLR6313

TLR6313

TLR5905

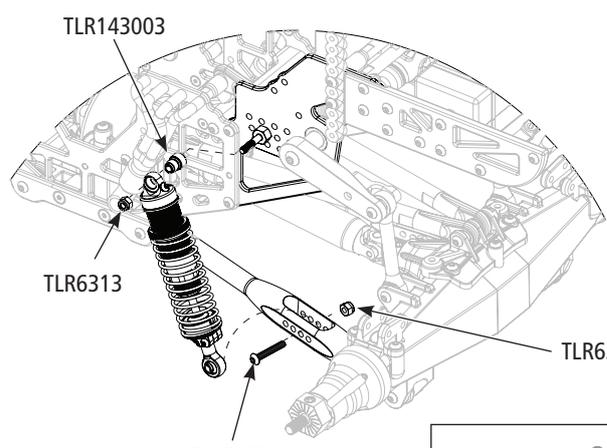


TLR143003

TLR6313

TLR5905


TLR6313




G4


TLR5903 x3

 M3 x 10mm BH


2-Sided Tape

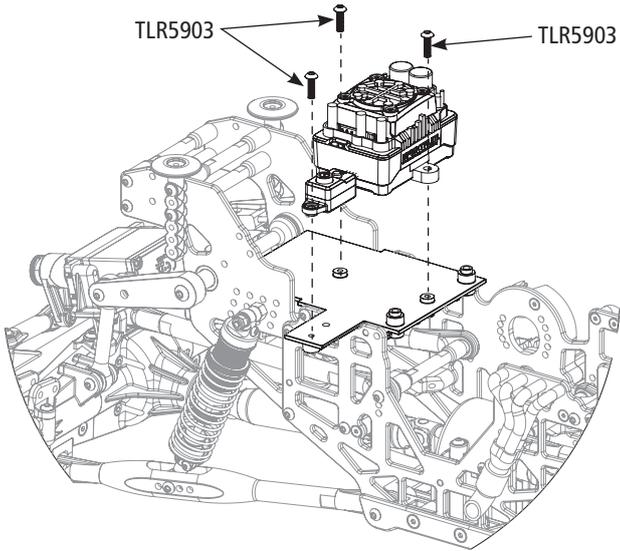




Mount receiver using 2-sided tape

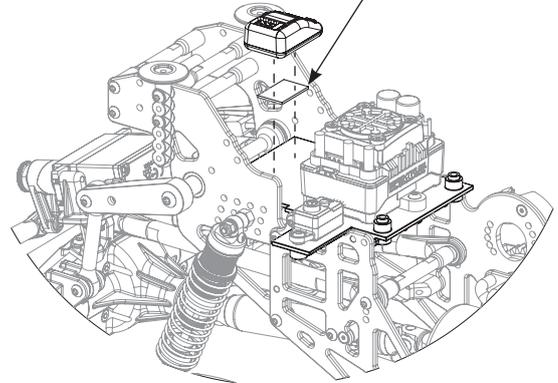

H1


TLR5903 (x12)

 M3 x 10mm BH

TLR5910 (x8)

 M3 x 14mm BH

TLR5904 (x2)

 M3 x 12mm BH

TLR5909 (x2)


 M3 x 16mm BH

TLR5911 (x2)

 M3 x 20mm BH


TLR6313 (x8)





 M3 Nylock Nut

LOS241074 (x8)


LOS241074 (x6)



TLR141002 (x2)


LOS241065 (x1)

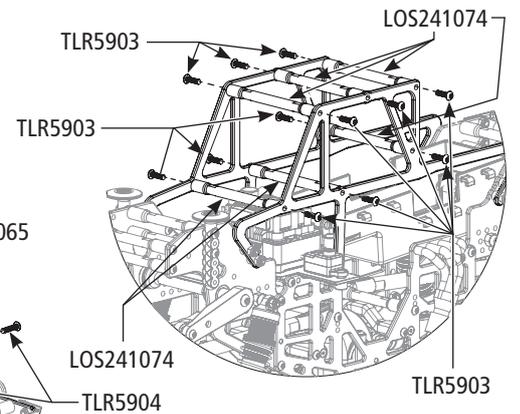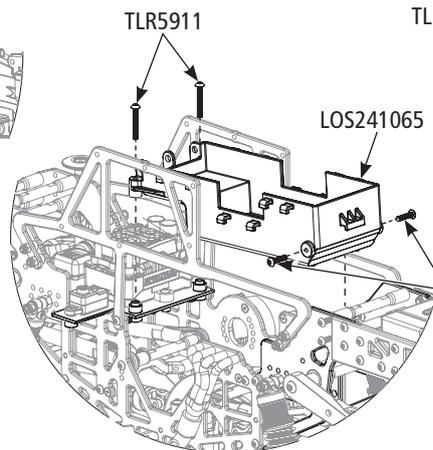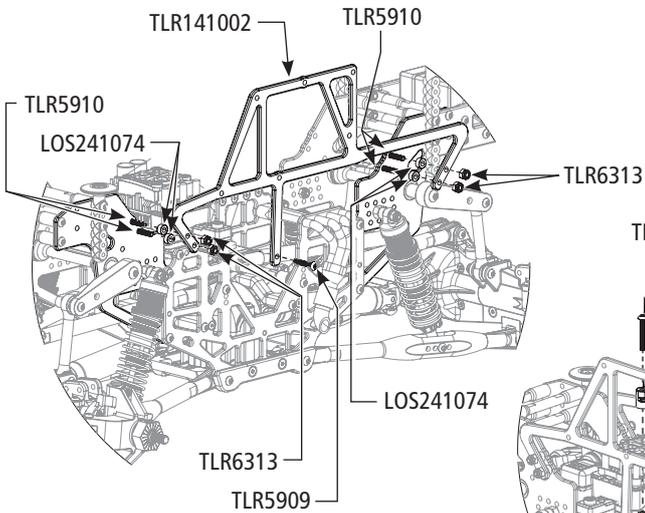


11

TLR5930 (x2)



M3 x 8mm CH

TLR5905 (x1)



M3 x 18mm BH

LOS236001 (x2)




M3 Washer

TLR255015 (x2)








M4 x 5mm Setscrew

LOS242054 (x1)



14T, 1.0M

LOS242032 (x1)

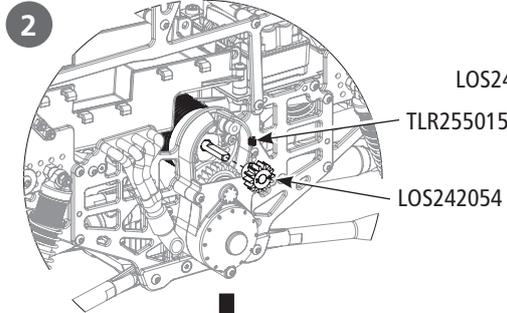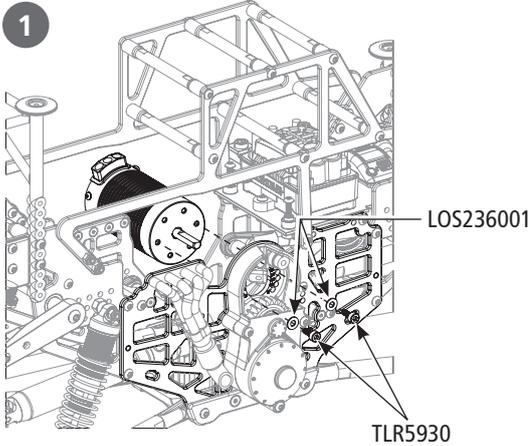


12

TLR6289 (x7)



M3 x 4mm BH

TLR235015 (x1)




M3 x 8mm Setscrew


ARA390298 (x1)






LOS241078 (x1)



LOS241078 (x1)





LOS241078 (x1)

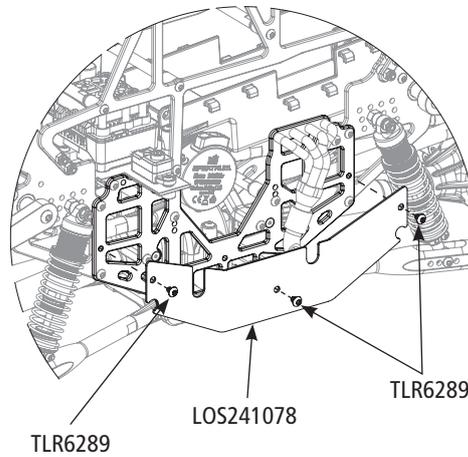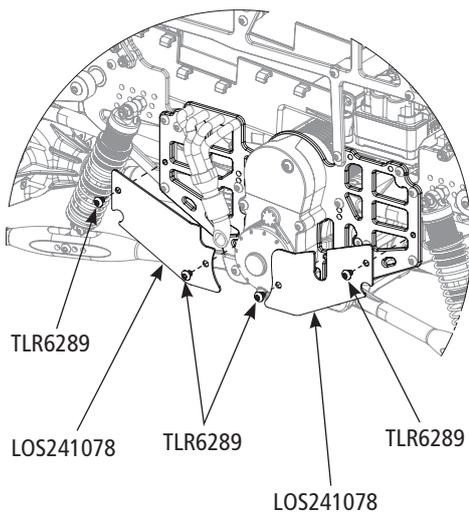

ARA390298

TLR235015

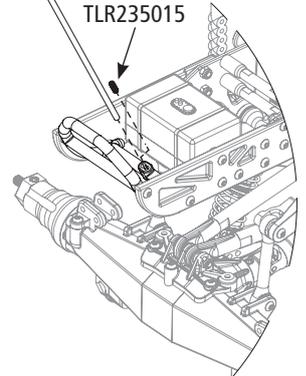





I3

Due to variations in battery sizes and cell capacity, select the battery strap that best secures your battery in the Low CG battery tray.

LOS241066 (x1)

LOS241066 (x1)

LOS241066 (x1)

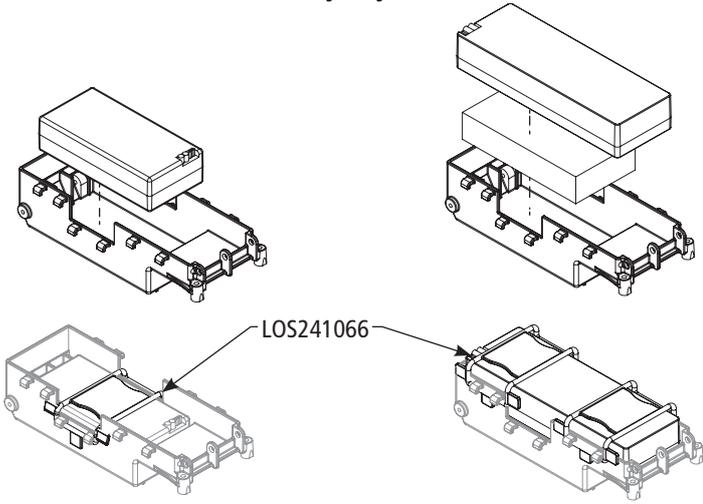

J1

LOS235027 (x4)

TLR5962 (x4)

LOS240029 (x4)

LOS240029 (x4)

LOS2400169 (x4)




M3 x 10mm Setscrew




M3 x 10mm FH




O-Ring




LOS240029 (x2)

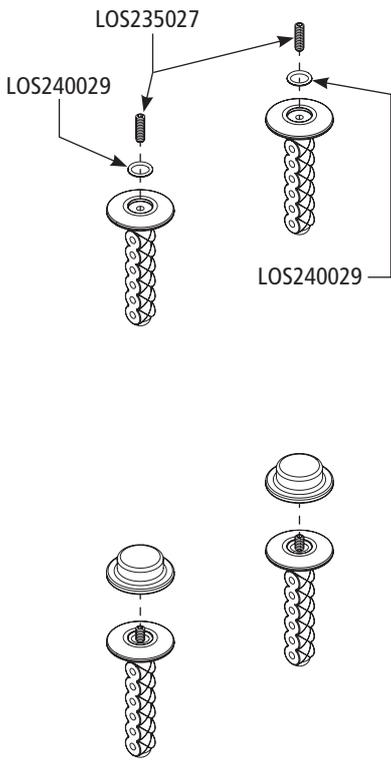

Body Mounting Option 1: Screw on style body mount uses a screw top to secure body to body mount post.

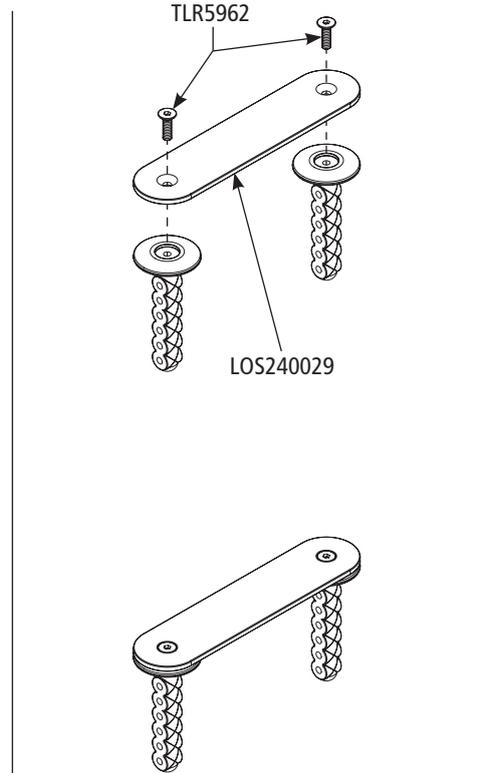

Body Mounting Option 2: Hook and Loop body mount. Use the cross bar mounted to the body mounts to apply hook and loop so you can mount your body without drilling any holes.

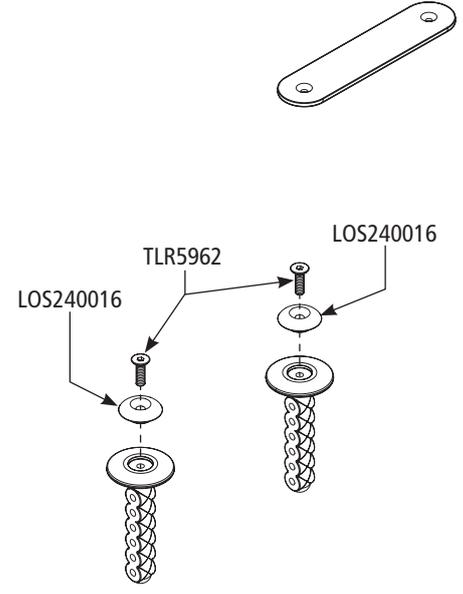


Body Mounting Option 3: Hard mounted body. Body is secured to the body mounts with screws and body buttons.

EXPLODED VIEW

LOSI TLR TUNED LMT 1/10 KIT


LOS04027

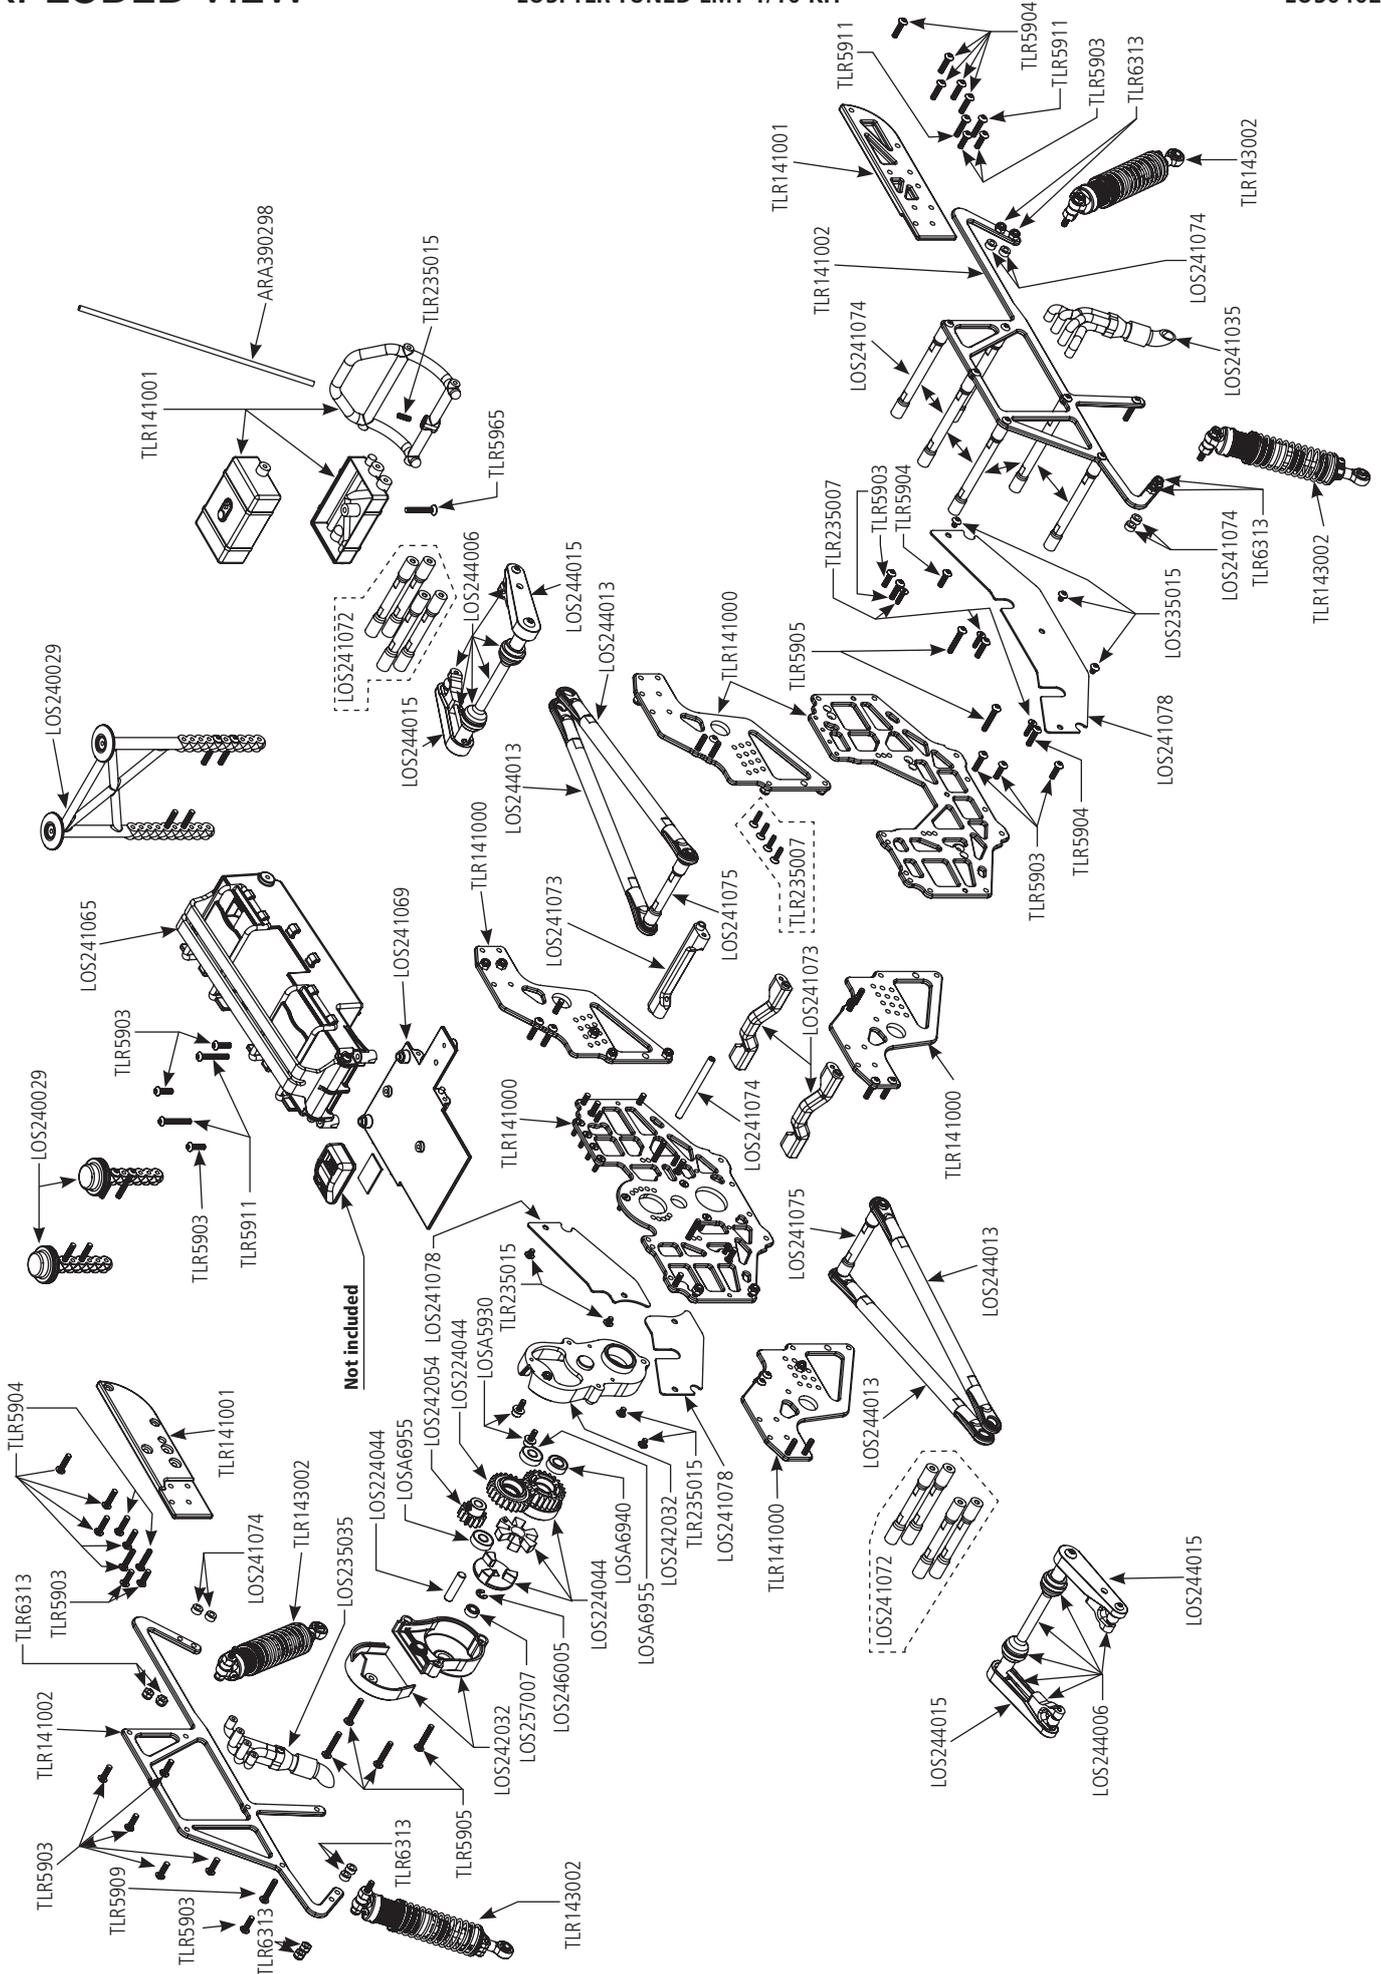


EXPLODED VIEW

LOSI TLR TUNED LMT 1/10 KIT

LOS04027

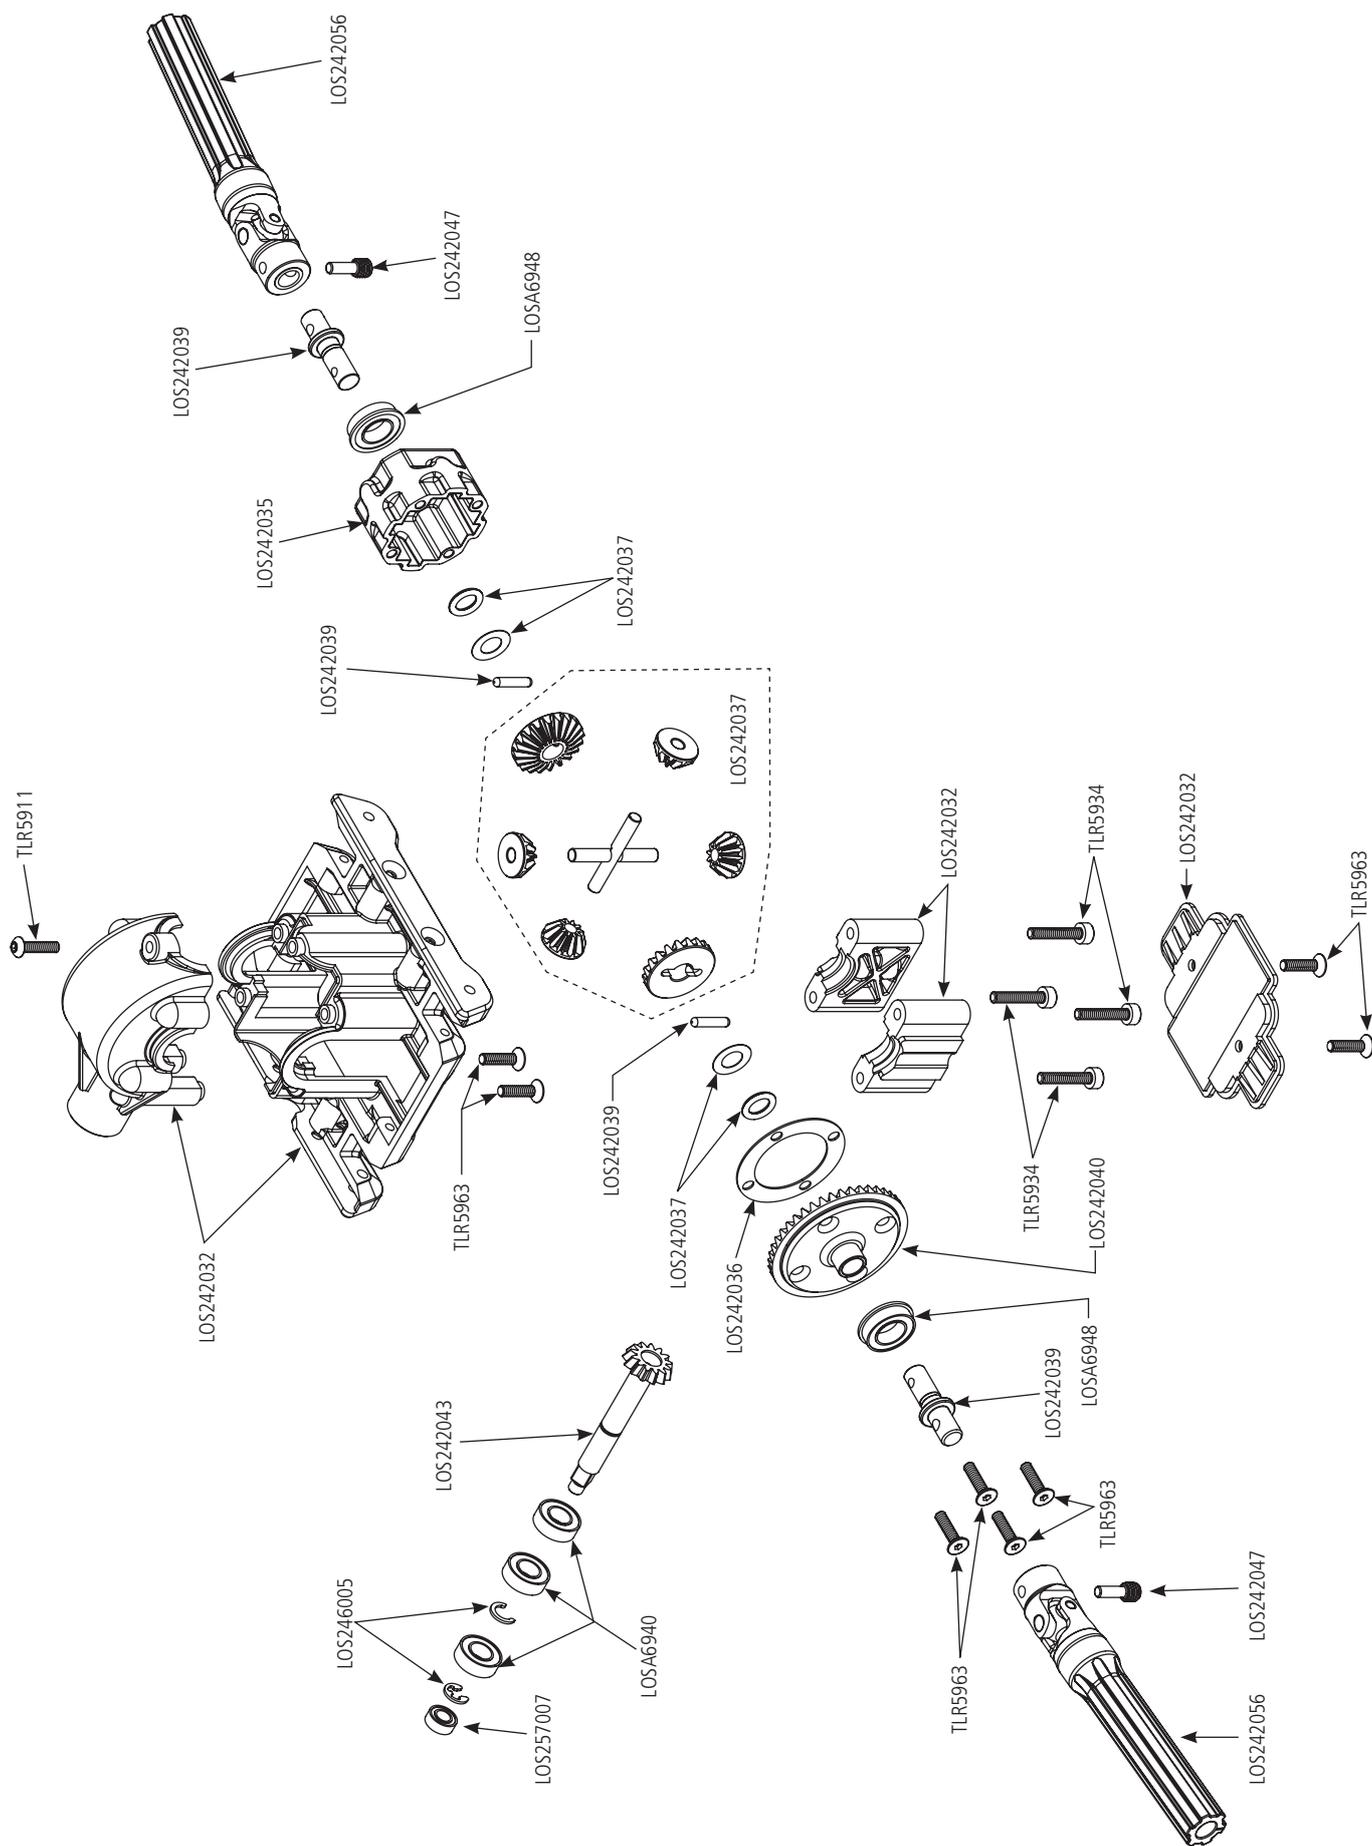

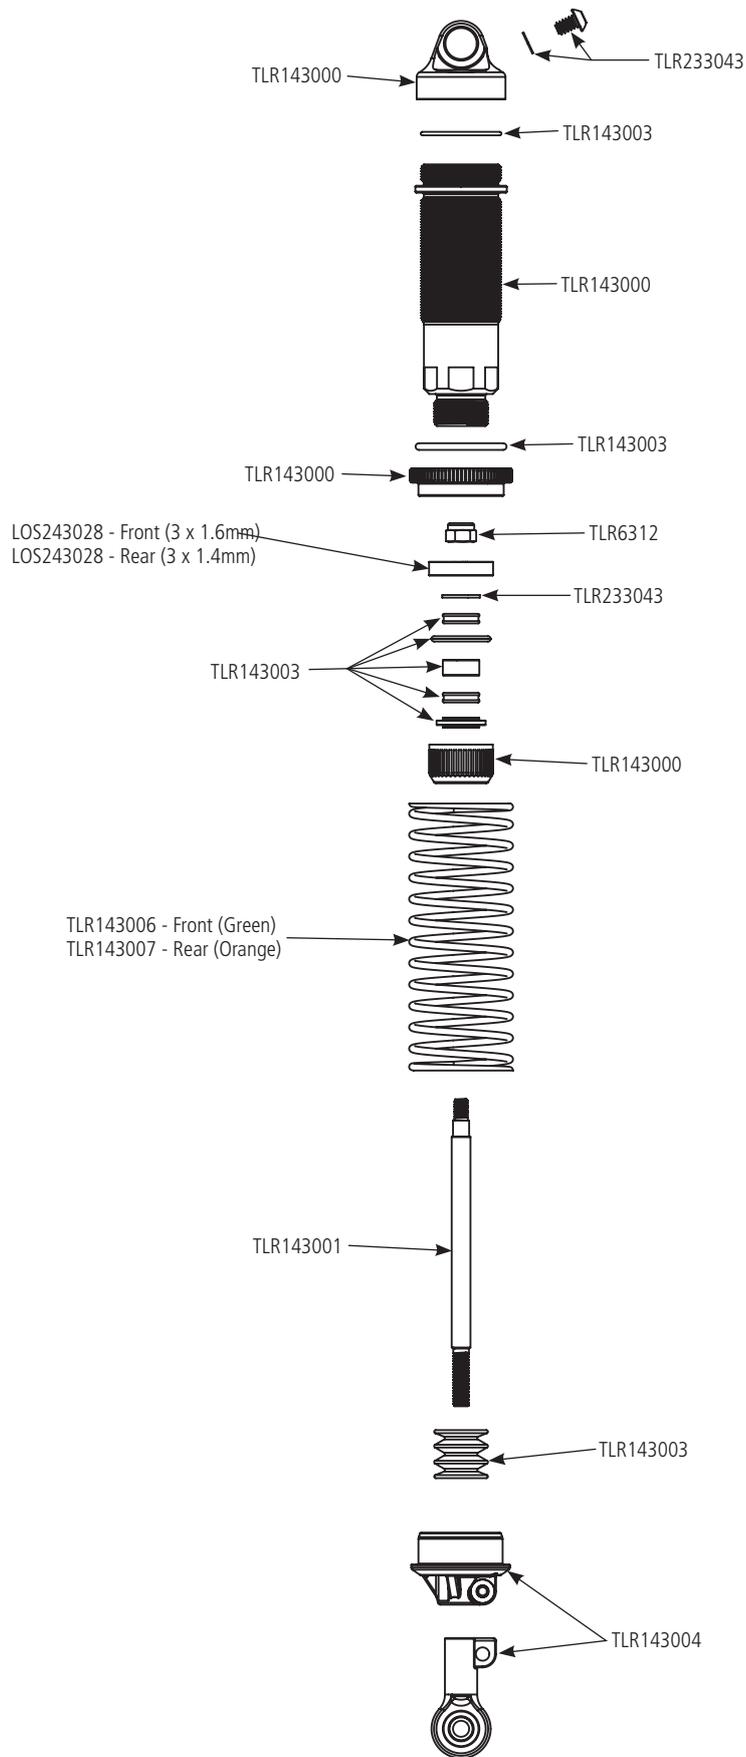

REPLACEMENT PARTS

LOS235002	Cap Head Screws M2.5 x 10mm (10)	LOS243029	Lwr Axle Susp Mnt (4): LMT, TTLMT
LOS235008	Flat Head Screws M2.5 x 5mm (10)	LOS243030	Upr Axle 4-link Mnt (2): LMT, TTLMT
LOS235012	Set Screws M4 x 4mm Cup Point (10)	LOS244005	Kingpin, Front (4): LMT
LOS235015	Locknut Flanged M5 Serrated (10)	LOS244006	Sway Bar Set (F/R): LMT
LOS235024	Button Head Screws M3 x 25mm (10)	LOS244010	7mm DoubleBossPivotBalls(10):LM
LOS235025	Button Head Screws M3 x 30mm (10)	LOS244011	RodEnds, Sway & DragLinks: LMT
LOS236001	3.2mm x 7mmx .5mm Washer(10)	LOS244013	Upr 4LinkBarSt 15 "WB(4):LMT Meg
LOS240016	Body Buttons,Top&Bottom(10):LMT	LOS244015	Sway Bar Cover (4): LMT, TTLMT
LOS240029	Body Mount Set: LMT, TTLMT	LOS244016	Spindle Carrier 5 deg,AL (L/R) :LMT, TTLMT
LOS241028	Safety Seat Set: LMT	LOS244018	Lwr 4-Link Mnt, AL, BLK (4): LMT, TTLMT
LOS241030	Steering Linkage Set: LMT	LOS246003	Body Clips, Black, Small(10):LM
LOS241036	Steering Servo Mount Plate: LMT	LOS246004	Diff Shim, M8x13x0.4mm (10): LM
LOS241065	Low CG BattTray&Straps: LMT Meg	LOS246005	E-Clip & C-Clip Hardware(20):LM
LOS241066	Battery Straps, Low CG: LMT Meg	LOS247000	6 x 13 x 5mm Metal Shield BB (4)
LOS241069	ESC/Recover Tray: LMT, TTLMT	LOS247001	6 x 15 x 5mm Metal Shield BB (4)
LOS241070	Sway Bar Cover (4): LMT, TTLMT	LOS257007	4 x 8 x 3mm Ball Bearing (4)
LOS241071	Helical Servo Saver, 25T: LMT, TTLMT	LOSA6948	8 x 14 x 4mm Flanged Rubber Seal BB (4)
LOS241072	Crossbar End Plates, AL, BLK (8): LMT, TTLMT	TLR141000	Chassis Set, Carbon Fiber: LMT, TTLMT
LOS241073	Crossbar Center, AL, BLK (3): LMT, TTLMT	TLR141001	Wheelite Bump Set: TTLMT
LOS241074	Crossbar & Spacer Cab, AL, BLK (6): TTLMT	TLR143000	Shock Body & Collar Set(2): TTLMT
LOS241075	Crossbar Up r4-link, AL, BLK (2): LMT, TTLMT	TLR143001	Shock Shaft, Link Mounted (2): TTLMT
LOS241076	Crossbar Brace Set, AL, BLK: LMT, TTLMT	TLR143002	Shock Set, Link Mount (2): TTLMT
LOS241077	Driver Cab, Carbon:TLR Tuned LM	TLR143003	Shock Rebuild (4): TTLMT
LOS241078	Chassis Side Cover, Clr: LMT, TTLMT	TLR143004	Shock Rod Ends (4): LMT, TTLMT
LOS241078	Chassis Side Cover, Clr: LMT, TTLMT	TLR143006	Spring, Green, 3.0 lbs(4): TTLMT
LOS242029	Wheel Hex Screw Pin (10): LMT	TLR143007	Spring, Orange, 3.6 lbs(4): TTLMT
LOS242032	Gearbox Housing Set w/covers:LM	TLR144000	Lwr Shk Mnt 4-Link Bar Set, 15" (4): LMT, TTLMT
LOS242033	Complete Diff Front or Rear: LM	TLR144002	Steering Spindle Set, AL(L/R): LMT, TTLMT
LOS242034	Complete Diff Center: LMT	TLR144003	Rr Axle Mnt, 3deg, AL (L/R): LMT, TTLMT
LOS242035	Diff Housing Set (1): LMT	TLR235007	Flat Head Screw M2.5 x 10mm (10)
LOS242036	Diff O-rings & Gaskets (3): LMT	TLR235015	Button Head Screws M3 x 4mm (10)
LOS242037	Internal Diff Rebuild Kit(1):LM	TLR245011	Button Head Screws, M2 x 6mm (10)
LOS242038	F/R Diff Outdrive Set (2): LMT	TLR245012	Button Head Screws, M2.5 x 4mm(10)
LOS242039	Center Diff Output Shafts(2):LM	TLR255002	Button Head Screws, M2.5 x 10mm (10)
LOS242040	F/R Diff Ring Gear: LMT	TLR255003	Cap Head Screws, M2.5 x 6mm (10)
LOS242042	Diff Pinion, 13T (1): LMT	TLR255015	Setscrew, Cup Point, M4x5mm (10)
LOS242043	13T Cntr Trans Pinion Gear: LMT	TLR5902	Button Head Screws, M3 x 8mm (10)
LOS242044	Idle & Cush Drive Gear Set: LMT	TLR5903	Button Head Screws, M3 x 10mm (10)
LOS242045	CushDriveRubberDamper,Med(2):LM	TLR5904	Button Head Screws, M3 x 12mm (10)
LOS242047	Cntr Driveshaft Screwpin(10):LM	TLR5905	Button Head Screws, M3 x 18mm (10)
LOS242048	Fr Universal Driveshaft (2): LM	TLR5906	Button Head Screws, M3 x 35mm (4)
LOS242049	Dogbones, Rear (2): LMT	TLR5909	Button Head Screws, M3 x 16mm (10)
LOS242051	Stub Axle, Rear (2): LMT	TLR5910	Button Head Screws, M3 x 14mm (10)
LOS242053	17mm Hex Adapter w/pin (4): LMT	TLR5911	Button Head Screws, M3 x 20mm (10)
LOS242056	Center Driveshaft St(1):LMT Meg	TLR5930	Cap Head Screws, M3 x 8mm (10)
LOS242056	Center Driveshaft St(1):LMT Meg	TLR5932	Cap Head Screws, M3 x 10mm (10)
LOS242057	Cntr Slider Drvshft(2): LMT Meg	TLR5934	Cap Head Screws, M3 x 16mm (10)
LOS242058	Axle Housing Set, Center: LMT, TTLMT	TLR5963	Flathead Screw, M3 x 12mm (10)
LOS242060	Third Member (2): LMT, TTLMT	TLR5964	Flat Head Screw, M3 x 16mm (10)
LOS243024	Shk Stnd Off, Link Mnt (4): LMT, TTLMT	TLR5965	Flat Head Screw, M3 x 20mm (10)
LOS243027	Mach Piston, 3 x 1.4mm (4): LMT, TTLMT	TLR6313	Locknut, M3 x .5 x 5.5mm (10)
LOS243028	Mach Piston, 3 x 1.6mm (4): LMT, TTLMT		

OPTIONAL PARTS

DYN2511	Curved Body Scissors	SPMXSM1000	Firma Brushless Motor, 3150Kv, 4mm Bullet
DYN2516	Straight Body Scissors	TLR143005	ShockSpring,White,2.7lb(4):TTLMT
DYN5500	Magnum Force 2 Motor Spray	TLR143008	Spring,Silver,4.0 lbs(4): TTLMT
DYNT1260	Shock Shaft Pliers/Multi-Tool	TLR144001	Lwr Shk Mnt 4-Link Bar 13.5" (4): LMT, TTLMT
DYNT2010	Machined Nut Driver Set 4pc.MET	TLR144004	Rr Axle Mnt Set, 0 deg, Al, BLK: LMT, TTLMT
DYNT2030	Machined Hex Driver Set (4) Met	TLR5284	Silicone Diff Fluid, 20,000CS
LOS242041	Diff Spool: LMT	TLR5285	Silicone Diff Fluid, 30,000CS
LOS244019	Limit Straps, 107mm(4):LMT,TTLMT	TLR5286	Silicone Diff Fluid, 50,000CS
LOS244020	Limit Straps, 112mm(4):LMT, TTLMT	TLR5288	Silicone Diff Fluid, 125,000CS
LOS343200	12mm Machined Wheel Hex (4): LM	TLR74004	Silicone Shock Oil, 25wt, 250SCT 2oz
LOS344002	Spindle Carrier 0deg, AL (L/R): LMT, TTLMT	TLR74005	Silicone Shock Oil, 27.5wt, 294 CST, 2oz
LOS344003	Axle Shock Mnt, AL, BLK (4): LMT, TTLMT	TLR74006	Silicone Shock Oil, 30wt, 338CST, 2oz
LOS7000	Losi Foam Pit Mat, 24" x 68"	TLR74007	Silicone Shock Oil, 32.5WT, 379CST, 2oz
PRO1011402	Destroyer M3 Front/Rear 2.6"	TLR74008	Silicone Shock Oil, 35WT, 420CS, 2oz
PRO1016202	Decimeter 2.6" M3 Tires, F/R (2): Clod Buster	TLR74009	Silicone Shock Oil, 37.5WT, 468CST, 2oz
PRO1018715	1/10 Demolisher Fr/Rr 2.6"/3.5" MT Tires Mounted 12mm Gray Wheels (2)	TLR74010	Silicone Shock Oil, 40WT, 516CST, 2oz
PRO322700	72ChevLongBedBodyCl:Revo3.3,LST,MGT	TLR74011	Silicone Shock Oil, 42.5WT, 563CST, 2oz
PRO356600	Cliffhanger High Performance Clear Body 12.3" (313mm) WB Cwlr	TLR74012	Silicone Shock Oil, 45WT, 610CST, 2oz
PRO636000	Lid Skid Body Protectors for SC, 1:10 and 1:8 Monster Truck Bodies	TLR74013	Silicone Shock Oil, 50WT, 710 CST, 2oz
SPM2340	DX3 SMART DSMR 3CH TX w/SR315	TLR74014	Silicone Shock Oil, 60WT 810CST, 2oz
SPMR5115	DX5C SMART 5CH DSMR TX ONLY	TLR74031	Silicone Shock Oil, 47.5WT, 660CST, 2oz
SPMSA6350	A6350 U-T/H-S Brushless HV Serv	TLR74032	Silicone Shock Oil 55WT, 760CST, 2oz
SPMSR2100	SR2100 DSMR Micro Race Rx AntLe	TLR75001	Silicone Diff Fluid, 40,000CS
SPMSR6200A	6200A 6CH AVC Surface RX	TLR75002	Silicone Diff Fluid, 60,000CS
SPMSS6290	S6290 U-T / H-S Digital HV WP Servo	TLR75003	Silicone Diff Fluid, 80,000CS
SPMX632S120HT	6300mAh 2S 7.6V Smart Pro Race	TLR75004	Silicone Diff Fluid, 100,000CS
SPMX82S120HT	8000mAh 2S 7.6V Smart Pro Race	TLR75008	Silicone Diff Fluid, 200,000CS
SPMXC2040	Smart S1400 G2 AC Charger, 1x400	TLR75009	Silicone Diff Fluid, 500,000CS
SPMXC2080	Smart S1100 AC Charger, 1x100W	TLR76009	TLR Lok Threadlock Blue
SPMXSE1130	Firma 130A Brushless Smart ESC, 2S-4S	TLR77000	High-Pressure Black Grease, 8cc
SPMXSE1130	Firma 130A Brushless Smart ESC 4S	TLR77002	Shock O-Ring Greace, 8cc

LIMITED WARRANTY

What this Warranty Covers

Horizon Hobby, LLC, (Horizon) warrants to the original purchaser that the product purchased (the "Product") will be free from defects in materials and workmanship for a period of 2 years from the date of purchase.

What is Not Covered

This warranty is not transferable and does not cover (i) cosmetic damage, (ii) damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or due to improper use, installation, operation or maintenance, (iii) modification of or to any part of the Product, (iv) attempted service by anyone other than a Horizon Hobby authorized service center, (v) Product not purchased from an authorized Horizon dealer, (vi) Product not compliant with applicable technical regulations, or (vii) use that violates any applicable laws, rules, or regulations.

OTHER THAN THE EXPRESS WARRANTY ABOVE, HORIZON MAKES NO OTHER WARRANTY OR REPRESENTATION, AND HEREBY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE PURCHASER ACKNOWLEDGES THAT THEY ALONE HAVE DETERMINED THAT THE PRODUCT WILL SUITABLY MEET THE REQUIREMENTS OF THE PURCHASER'S INTENDED USE.

Purchaser's Remedy

Horizon's sole obligation and purchaser's sole and exclusive remedy shall be that Horizon will, at its option, either (i) service, or (ii) replace, any Product determined by Horizon to be defective. Horizon reserves the right to inspect any and all Product(s) involved in a warranty claim. Service or replacement decisions are at the sole discretion of Horizon. Proof of purchase is required for all warranty claims. SERVICE OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY.

Limitation of Liability

HORIZON SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY, REGARDLESS OF WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, TORT, NEGLIGENCE, STRICT LIABILITY OR ANY OTHER THEORY OF LIABILITY, EVEN IF HORIZON HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Further, in no event shall the liability of Horizon exceed the individual price of the Product on which liability is asserted. As Horizon has no control over use, setup, final assembly, modification or misuse, no liability shall be assumed nor accepted for any resulting damage or injury. By the act of use, setup or assembly, the user accepts all resulting liability. If you as the purchaser or user are not prepared to accept the liability associated with the use of the Product, purchaser is advised to return the Product immediately in new and unused condition to the place of purchase.

Law

These terms are governed by Illinois law (without regard to conflict of law principals). This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Horizon reserves the right to change or modify this warranty at any time without notice.

WARRANTY SERVICES

Questions, Assistance, and Services

Your local hobby store and/or place of purchase cannot provide warranty support or service. Once assembly, setup or use of the Product has been started, you must contact your local distributor or Horizon directly. This will enable Horizon to better answer your questions and service you in the event that you

may need any assistance. For questions or assistance, please visit our website at www.horizonhobby.com, submit a Product Support Inquiry, or call the toll free telephone number referenced in the Warranty and Service Contact Information section to speak with a Product Support representative.

Inspection or Services

If this Product needs to be inspected or serviced and is compliant in the country you live and use the Product in, please use the Horizon Online Service Request submission process found on our website or call Horizon to obtain a Return Merchandise Authorization (RMA) number. Pack the Product securely using a shipping carton. Please note that original boxes may be included, but are not designed to withstand the rigors of shipping without additional protection. Ship via a carrier that provides tracking and insurance for lost or damaged parcels, as Horizon is not responsible for merchandise until it arrives and is accepted at our facility. An Online Service Request is available at http://www.horizonhobby.com/content/service-center_render-service-center. If you do not have internet access, please contact Horizon Product Support to obtain a RMA number along with instructions for submitting your product for service. When calling Horizon, you will be asked to provide your complete name, street address, email address and phone number where you can be reached during business hours. When sending product into Horizon, please include your RMA number, a list of the included items, and a brief summary of the problem. A copy of your original sales receipt must be included for warranty consideration. Be sure your name, address, and RMA number are clearly written on the outside of the shipping carton.

NOTICE: Do not ship LiPo batteries to Horizon. If you have any issue with a LiPo battery, please contact the appropriate Horizon Product Support office.

Warranty Requirements

For Warranty consideration, you must include your original sales receipt verifying the proof-of-purchase date. Provided warranty conditions have been met, your Product will be serviced or replaced free of charge. Service or replacement decisions are at the sole discretion of Horizon.

Non-Warranty Service

Should your service not be covered by warranty, service will be completed and payment will be required without notification or estimate of the expense unless the expense exceeds 50% of the retail purchase cost. By submitting the item for service you are agreeing to payment of the service without notification. Service estimates are available upon request. You must include this request with your item submitted for service. Non-warranty service estimates will be billed a minimum of ½ hour of labor. In addition you will be billed for return freight. Horizon accepts money orders and cashier's checks, as well as Visa, MasterCard, American Express, and Discover cards. By submitting any item to Horizon for service, you are agreeing to Horizon's Terms and Conditions found on our website http://www.horizonhobby.com/content/service-center_render-service-center.

ATTENTION: Horizon service is limited to Product compliant in the country of use and ownership. If received, a non-compliant Product will not be serviced. Further, the sender will be responsible for arranging return shipment of the un-serviced Product, through a carrier of the sender's choice and at the sender's expense. Horizon will hold non-compliant Product for a period of 60 days from notification, after which it will be discarded.

10/2015

WARRANTY AND SERVICE CONTACT INFORMATION

Horizon Hobby	Contact Information	Address
Horizon Service Center (Repairs and Repair Requests)	servicecenter.horizonhobby.com/RequestForm/	2904 Research Rd Champaign, Illinois, 61822 USA
Horizon Product Support (Product Technical Assistance)	productsupport@horizonhobby.com 877-504-0233	
	websales@horizonhobby.com	
Sales	800-338-4639	



WWW.LOSI.COM

© 2023 Horizon Hobby, LLC. Team Losi Racing, TLR, and TLR-Lok are trademarks or registered trademarks of Horizon Hobby, LLC.
The Spektrum trademark is used with permission of Bachmann Industries, Inc.
All other trademarks, service marks or logos are property of their respective owners. Patents Pending